



bond it

www.bond-it.co.uk

bond it


Never Compromise on **Quality!**



Unit G16,
River Bank Way,
Lowfields Business Park,
Elland, West Yorkshire.
HX5 9DN.

t: 01422 315300
f: 01422 315310
e: sales@bond-it.co.uk
www.bond-it.co.uk

BOND IT specialises in the supply of an extensive range of materials to the merchant, DIY, glazing and roofing sectors.



Product Catalogue



Introduction



Bond It manufactures and supplies specialist products to the construction industry, with particular emphasis on the DIY, glazing, roofing and merchant sectors.

This extensive experience has lead Bond It to become a significant player in the UK construction and consumer DIY markets, offering a comprehensive range of high quality silicones and sealants, construction adhesives, building chemicals, bitumen compounds, tile adhesives and polyurethane foams.

In recent years, millions of pounds have been invested in buildings, plant and machinery at Bond It. This includes the latest blending, mixing and automated filling machines, with the capacity to fill in excess of 40,000,000 cartridges per year.

Continually reinvesting profits, maximises Bond It's efficiency and productivity, helps to keep prices down, enables the



Company to work to tight deadlines and allows Bond It to offer its whole range ex-stock.


All products manufactured at Bond It are done so to a stringent quality control system accredited to ISO 9001. Many products are actually manufactured to national, European and International standards. Strict QC checks from raw materials through to finished goods ensure product specifications meet the requirements of the end user to the highest level.

Recognition of environmental management is a key responsibility for the Company. Bond It continually improves environmental performance and encourages the development of products and processes that are both safe and have low impact on the environment.

Bond It's mission statement is to pursue a process of brand development and product innovation, whilst providing exceptional quality and service at competitive prices.



Contents Page

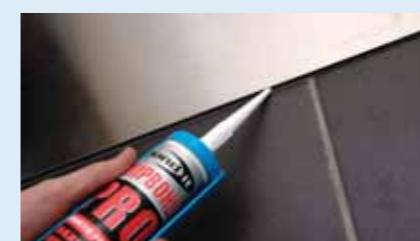

Unit G16,
River Bank Way,
Lowfields Business Park,
Elland, West Yorkshire.
HX5 9DN.

t: 01422 315300
f: 01422 315310
e: sales@bond-it.co.uk

www.bond-it.co.uk

Mate Range

Silicone Sealants :	4
Silicone & Acrylic Sealants:	5
Specialist Sealants, Construction Adhesive & Extruders :	6
Decorators Sealants & Miscellaneous Sealants :	7
PU Foams & Foam Guns :	8
Sealant Guide :	9

Premiere Range

Silicone Sealants :	10
Specialist Sealants :	11-12
PU Foam & Foam Applicators :	13
Applicator Guns :	14

Adhesives

Specialist Glues :	16-18
Industrial Glues :	19

Decorators Range

Sealants, Fillers & Quick Set Epoxy :	20
DIY Superglues :	21

Tile Adhesives

Ready Mixed Tile Adhesives :	23
Ready Mixed and Cement Based Grouts :	24
Cement Based Adhesives & Primers :	25
Cement Based Adhesives & Tile Maintenance :	26
Tile Adhesives User Guide :	27

Builders Complete Range

Building Chemicals & Mixes :	29-31
Building Chemicals & Compounds :	32-33
Cleaners & Compounds :	34
Adhesive Tapes :	35
Waterproofing Systems :	36
Paints and Dyes :	37

Bitubond Range

Bitumen Compounds :	39-41
Waterproofing Systems :	43

Xtreme

Xtreme Products :	44-45
-------------------	-------

Plumbing Range

Plumbing Solutions :	46-47
----------------------	-------

Flooring

Primers, Membranes & Adhesives :	48
Self-levelling Compounds & Adhesives :	49

Merchandising

Floor Stands & Cartridge Trays :	50
Merchandising Boxes, Leaflets, Dispensers & Website :	51

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

plumbing

Flooring

MateRange



A comprehensive range of silicone and acrylic sealants for D.I.Y. and professional trade use,

covering all aspects of sealant applications including glazing and roofing installations as well as general decorating and household sealing jobs.

Size: EU3 | Life: 25 Years | ← 25% →

Ulti-Mate Builders Silicone

A superior, low modulus, neutral cure builders silicone sealant. Suitable for internal and external applications where the joint movement does not exceed 25% and where the long term durability of silicone is required. It has primerless adhesion to most construction materials and remains permanently flexible for up to 25 years. Conforms to ISO11600-F&G-20LM and BS5889:A.

Application: Suitable for sealing around doors and windows and for general building maintenance. It can be used to fix glazing systems, cap beading and glass and also for expansion and joint sealing to precast concrete and brickwork.

Colours

WH	T	BR	GR	BZ	IV	BL	TK
----	---	----	----	----	----	----	----

PRODUCT CODE: BDU

Size: EU3 | Life: 20 Years | ← 25% → | Fungal Resistant

Multi-Mate Multi-Purpose Silicone

A multi-purpose, high modulus silicone rubber sealant which contains fungicide. Suitable for most sealing jobs around the home. Permanently flexible and skins in minutes. Conforms to ISO11600-F&G-20HM and BS5889:B.

Application: Suitable for sealing and waterproofing in areas of high humidity. It has excellent adhesion to glass, glazed surfaces, ceramic tiles, aluminium, many plastics and most paints. Remains flexible for up to 20 years.

Colours

WH	T	BR	GR	BZ	BL
----	---	----	----	----	----

PRODUCT CODE: BDM

Size: EU3 | Life: 20 Years | ← 25% →

Pro-Mate Glazing Silicone

An advanced, low modulus, acetoxy silicone sealant. Suitable for exterior and interior applications where the joint movement does not exceed 25% and where the long term durability of silicone is required. Conforms to ISO11600-G-20LM and BS5889:A.

Application: Suitable for sealing and waterproofing around doors and window frames and for general building maintenance.

Colours

WH	T	BR
----	---	----

PRODUCT CODE: BDPM

Size: EU3 | Life: 25 Years | ← 25% →

Flash-Mate Roofing & Flashing Silicone

A fast skinning roofing sealant that reduces weather ingressions, tile lift and noise. Tough, resilient and compatible with lead. Conforms to ISO11600-F-25LM and BS5889:A.

Application: Can be used to bond glass and glazing plastics as well as small sections of roofing materials under repair. Ideally suited for sealing roof-lights, conservatories, soffits, glass houses, industrial roofing systems, lead flashings and to prevent tile lifting and wind noise. Also has excellent UV, heat and ozone resistance and sets to tough resilient rubber.

Colours

GR

PRODUCT CODE: BDEAD

Page Contents:

Silicone Sealants

MateRange

Page Colour Guide:	(WH) White	(T) Transparent	(BR) Brown	(GR) Grey	(BZ) Bronze	(IV) Ivory	(BC) Beech	(PN) Pine	(OK) Oak	(TK) Teak	(MH) Mahogany	(PK) Pink	(BL) Black
--------------------	------------	-----------------	------------	-----------	-------------	------------	------------	-----------	----------	-----------	---------------	-----------	------------

The colour swatches reproduced in this catalogue are for guidance only and are not a true representation of the colour of the cured product.

Size: EU3 | Life: 25 Years

Marine-Mate Aquarium Sealant

A high strength, silicone polymer, sealant and adhesive. Fast curing, non-shrinking, and gives a strong bond that offers good elasticity and joint flexibility. Has excellent adhesion to glass and is completely waterproof making it suitable for permanent immersion in water. Conforms to ISO11600-F&G-20HM.

Application: Suitable for sealing and bonding glass, ceramics and glazed surfaces. It can also be used with wood, metal, plastics and stone but a primer is recommended prior to the application of the sealant. Marine-Mate contains no fungicides or oils which may leach into water. The exceptional translucency of this product makes it ideal for aquarium use.

Colours

T



PRODUCT CODE: BDAMT

Size: EU3 | Life: 25 Years

Glass-Mate Mirror Adhesive

A neutral cure silicone for interior mirror fixing. Ready-to-use, one-part silicone sealant which is non-corrosive and odourless. Has excellent unprimed adhesion on most mirror coatings and has outstanding resistance to heat and humidity. It's properties are unaffected by sunlight, ultra-violet radiation and temperature extremes. This product will accommodate thermal expansion.

Application: Suitable for internal bonding of mirrors, coated glass, glazed surfaces, ceramics, enamel, metals, PVCu, polycarbonate and treated or untreated wood, to most common substrates. **Note:** Not suitable for use in the manufacture of structural glazing.

Colours

T



PRODUCT CODE: BDMIRT

Size: EU3 | Life: 15 Years | ← 10% →

Frame-Mate Door & Window Sealant

A high quality, water-resistant, acrylic frame sealant with good adhesion to most building materials. Easy to clean, flexible joint filler which can be readily over-painted and offers outstanding weathering properties. Can be over-painted, stained or varnished for colour matching purposes.

Application: Suitable for sealing around door and window frames and soffit boards. It can also be used for filling cracks and joints with low movement. **Note:** Not suitable for PVCu.

Colours

WH	BR
----	----



PRODUCT CODE: BDFM

Size: EU3 | Life: 15 Years | ← 10% →

Lami-Mate Timber and Laminate Sealant

A polymer enhanced, flexible sealant and gap-filler designed for sealing all tongue and groove laminate and hardwood flooring. Stays permanently flexible. Can be over-painted, stained or varnished for colour matching purposes, once cured.

Application: Can be used for draught-proofing around timber flooring to provide an effective dust and air tight seal. It can also be used for sealing around all types of fitted furniture i.e. bedroom and kitchen fittings, laminate worktops, etc. LAMI-MATE is also suitable for sealing glass panels into kitchen unit doors.

Colours

BC	PN	OK	MH
----	----	----	----



PRODUCT CODE: BDLS

Size: EU3 | Life: 15 Years | ← 10% → | Fungal Resistant

Bath-Mate Bath & Kitchen Sealant

A high quality, acrylic sealant with good adhesion to plastic, ceramic tiles and porcelain. Remains permanently flexible and forms a watertight seal to most surfaces that can be over-painted. Contains a powerful anti-fungal compound to retard mould growth. Can be over-painted, stained or varnished for colour matching purposes.

Application: Suitable for sealing around baths, sinks and worktops, where an easy water clean up is required after application. Can also be used as a grout repair.

Colours

WH



PRODUCT CODE: BDBA

Size: 100ml

De-Bond Mate Silicone Eater

Now in new handy applicator bottle - a non-drip gel formula for the complete removal of cured silicone sealant, particularly when silicone has been accidentally smeared over glass, ceramics or counter tops.

Application: For removing old silicone sealant during renovations. It is suitable for use on brick, concrete, metals, glass, PVCu and melamine laminates. Simply brush the remover over the old silicone, allow to stand for at least 2 hours, then wipe clean with a paper tissue or dry cloth and ensure all traces of solvent are removed. Keep some water handy to deactivate any runs. **Note:** Shake vigorously before use.



PRODUCT CODE: DBON1

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

Plumbing

Flooring

Mate Range

Page Contents:

Specialist Sealants
Construction Adhesive
Extruders

Size: EU3 | Life: 5 Years | ← 5% →

Build-Mate Building Mastic

An oil based, gunable pointing and sealing mastic for general exterior building use. Offers superior adhesion to all building surfaces and can be over-painted when cured with most conventional oil based paints. Weatherproof in most applications. Sag resistant and low toxicity. **Note:** Not suitable for use with PVCu.

Application: Can be used to seal and bed window and door frames manufactured from metal or wood. It can also be used for the maintenance of low rise building joints, seals and flashing and for pointing around precast building materials.

Colours

BL	BR	ST	WH
----	----	----	----

PRODUCT CODE: **BDOB**

Size: EU3 | Life: 25 Years

Rain-Mate All Weather Sealant

A flexible, water repellent, general purpose sealant that has excellent adhesion to all surfaces, even when damp. This product can be over-painted and it will not crack, slump or become brittle with age.

Application: Suitable for use on brick, concrete, stone, all metals, painted or bare wood, glass, vinyl and most plastics. Compatible with bitumen and asphalt and ideal for roof repairs in damp conditions (any standing water must be removed before application). Can also be used to seal doors, windows, roofs, cladding and vehicle bodies.

Colours

WH	CL	BL
----	----	----

PRODUCT CODE: **BDAWS**

Size: EU3 | Life: 10-15 Years | ← 5% →

Roof-Mate Roof & Gutter Sealant

A polymeric reinforced lap jointing sealant used to prevent leaks in gutters and downpipes. It forms a flexible seal capable of accommodating 5% movement.

Application: Suitable for repairing and maintaining general roofing and roof drainage systems. It is ideal for use on metal, construction grade plastics, paint, stone, timber, brick and bitumens.

Colours

BL

PRODUCT CODE: **BDGR**

Economy Sealant Guns

An economy extruder gun for use with cartridge products. All guns have a hexagonal drive bar for improved control.



Sizes:
300ml
400ml
900ml

PRODUCT CODE: **BDCG300** PRODUCT CODE: **BDCG400** PRODUCT CODE: **BDCG900**

Size: EU3 | Bridges gaps upto ← 12mm →

Saves Nails

An instant grab, non-slumping, multi-purpose building adhesive with gap-filling properties that will bridge gaps up to 12mm.

Application: Suitable for interior and exterior use on most common building materials including brick, ceramic, glass, metals, plaster, plastics, wood and stone. Replaces mechanical fixings in a variety of DIY applications. **Note:** This product is Toluene free!



Boxed in striking merchandising cartons for added display impact and easy dispensing.

Carton holds 25 cartridges.

PRODUCT CODE: **BDSN2**

Colours

BG

Mate Range

Page Contents:

Decorators Sealants
Miscellaneous
Silicones

Page Colour Guide:	White	Transparent	Brown	Grey	Stone	Buff	Beige	Toffee	Teak	Black
	(WH) White	(T) Transparent	(BR) Brown	(GR) Grey	(ST) Stone	(BU) Buff	(BG) Beige	(TF) Toffee	(TK) Teak	(BL) Black

Size: EU3 & EU4 | Life: 10 Years | ← 5% →

Dec-Mate Flexible Filler

An easy-to-apply, quick drying, interior decorators caulk. Remains permanently flexible and can be smoothed and over-painted within 1-2 hours of application. Has good adhesion to most building materials.

Application: Suitable for sealing door and window frames as well as interior sealing of skirting boards, plastics and polystyrene coving. DEC-MATE is also suitable for sealing interior partition joints around fitted furniture and for repairing small cracks and joints with low movement in plaster and wood.

Colours

WH

PRODUCT CODE: **BDDF400**

PRODUCT CODE: **BDDM**

Size: EU3 & EU4 | Life: 20 Years | ← 25% →

WP70 Oxime Silicone

A high quality, low modulus, neutral cure silicone for perimeter sealing of external door and window frames. Rapid curing with good adhesion properties and additional PVCu adhesion promoters. Conforms to ISO11600-F&G-25LM and BSS89:A. **Note:** For external use only.

Application: For perimeter sealing of external wood, aluminium and PVCu door and window frames and for weather sealing and flexible jointing of infill panels. **Note:** Not suitable for use with aquaria or for use on bitumen or asphalt. Over-painting is not recommended. Risk of yellowing in low UV light situations.

Colours

T	ST	GR	BU	WH	BR	TK	TF	BL
---	----	----	----	----	----	----	----	----

PRODUCT CODE: **WP70**

Size: EU3 & EU4

Caulk-Mate Decorators Caulk

A quick drying interior decorators filler that can be smoothed and over-painted within 1-2 hours of application. Adheres to most surfaces.

Application: For sealing and filling gaps and cracks in skirting boards, ceilings, stair risers, interior wooden door and window frames, fitted furniture and light fittings. Also for filling interior cracks and damage in plaster, brick, concrete and plasterboard. Can be over-painted with emulsion paint as soon as a skin forms, after approximately 1 hour. For oil based paints allow to dry completely for 24-48 hours before over-painting. **Note:** Not recommended for external use, for PVCu or in wet areas.

Colours

WH

PRODUCT CODE: **BDOHC400**

PRODUCT CODE: **BDOHC300**

Size: EU3 | Life: 20 Years | ← 25% →

GP200 Silicone

A general purpose, silicone rubber sealant with fungicide, suitable for most sealing jobs around the home.

Application: Suitable for sealing and waterproofing in areas of high humidity. It has excellent adhesion to glass, glazed surfaces, ceramic tiles, many plastics and most paints. It is ideal for applications in bathrooms, shower rooms, utility rooms and general DIY applications including kitchen work tops. **Note:** Do not use on surfaces where water can penetrate through porous materials to affect the bond without first carrying out remedial work. Not suitable for fixing of mirrors or sealing natural marble.

Colours

WH	T	BR	BL
----	---	----	----

PRODUCT CODE: **BDSV**



Cove-Mate Coving Adhesive

A high strength, gap-filling, coving and decorating adhesive. Solvent-free, quick grab, and suitable for interior coving and decorative mouldings. It replaces mechanical fixings in a multitude of home improvement applications. Dries to a white finish and can be over-painted once dry.

Application: Ideal for fixing polystyrene and PU coving, skirting boards, architraves and dado rails, etc. It can be used internally on plaster, brick and stone. It is also suitable for bonding work tops to base units and for bonding cork tiles and cork sheet. **Note:** Not suitable for polythene, polypropylene, teflon, nylon or plaster coving.

Colours

WH

PRODUCT CODE: **BDCMWH**

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

Plumbing

Flooring

Mate Range



Size: 500ml & 750ml

Fill and Fix Expanding Foam Filler

Expanding foam that is based on a moisture curing polyurethane prepolymer. Quick, economic and easy to apply, it is supplied ready-to-use for fitting doors, windows, insulating pipes and filling gaps. Improves draught and heat insulation. Also contains an environmentally safe propellant, which complies with the latest EU regulations. Available in 500ml and 750ml aerosol cans or 750ml gun grade canister which can be used with a gun foam applicator.

- Application:**
- Window setting (where a clean and controlled backfill is required).
 - Entrance door linings.
 - Any kind of small break-throughs in walls and other cavities.
 - Can yield up to 40 times can volume.

Conforms to Class B3 (Foam rating for products with no fire resistant additives or properties).



GUN GRADE: BDFIXG750

PRODUCT CODE: BDFIX500

PRODUCT CODE: BDFIX750

Gun Foam Applicators

Professional Gun Foam Applicator (AG1)

A top quality metal gun for use with gun grade polyurethane expanding foams. Screws onto the canister for quick and easy application. Heavy duty for professional use. Size: Universal

PRODUCT CODE:
BDAG1

Heavy Duty Foam Applicator (AK45)

A professional gun for delivering polyurethane foam. Made entirely of metal, it is robust and easy to handle with its ergonomic handgrip made of anti-solvent nylon. Body, adaptor and nozzle is teflon coated to prevent foam from sticking to the gun and facilitate cleaning. Exceptionally hard wearing gun parts - this is a gun for life!! Size: Universal

PRODUCT CODE:
BDAK45

Sealant Guide

Product	Description	Grade	Use	Movement Capacity	Life Expectancy	Conforms To	Colours	Shelf Life	PG
AS900 Acoustic Sealant	Acrylic sealant.	Interior	Sealing and bonding plasterboard and acoustic tiles. Used for walls, ceilings and dry linings.	7.5%	25 Years	N/A	White	12 Months	11
AS10	Low modulus neutral cure silicone.	Exterior	For sealing expansion joints and non-porous materials such as PVCu, aluminium, metal cladding, glass, curtain walling, brickwork, wood and lead.	25%	25 Years	ISO11600-F&G-25LM	White, Magnolia, Teak, Black, Grey, Brick Red, Anthracite, Buff and Stone	12 Months	12
Bath-Mate Bath & Kitchen Sealant	Acrylic filler with fungicide.	Interior	Sealing around windows in areas of high humidity i.e. Bathrooms and shower rooms. Can also be used to seal around baths and sinks.	10%	15 Years	N/A	White	12 Months	5
Build-Mate Building Mastic	Oil based mastic. Overpaintable with oil based paints.	Exterior	Bedding, pointing and sealing. Not for use on PVCu.	5%	5 Years	N/A	White, Stone, Black & Brown	12 Months	6
Caulk-Mate Decorators Caulk	Quick drying acrylic sealant. Overpaintable.	Interior	Sealing around skirting boards, door and window frames, polystyrene coving and general gap-filling.	5%	10 Years	N/A	White	12 Months	7
Cove-Mate Coving Adhesive	Acrylic sealant and adhesive. Overpaintable.	Interior	Installation of lightweight coving.	5%	10 Years	N/A	White	12 Months	7
Dec-Mate Decorators Filler	Interior acrylic filler. Overpaintable.	Interior	Filling gaps and cracks prior to decorating.	5%	10 Years	N/A	White	12 Months	7
FG8 Food Grade Silicone	High modulus FDA approved fungicidal silicone.	Interior	Applications within the food machinery and preparation industries.	20%	25 Years	ISO11600-F&G-20HM, BS5889-B	White	18 Months	11
Flash-Mate Roofing & Flashing Silicone	Low modulus silicone. Lead compatible.	Exterior	Sealing of lead flashing and sheet to brick, stone & concrete.	25%	25 Years	ISO11600-F-25LM BS5889-A	Grey	12 Months	4
Fire-Shield AC	Fire resistant intumescent acoustic acrylic sealant and adhesive. 4 Hour fire resistance.	Interior	Interior perimeter sealing of fire resistant doors and fire resistant joints. Also bonds dry lining systems and partition walls and ceilings.	8%	20 Years	BS476 PART 20; BSEN 140 PART 3 & BSEN 20140	White & Brown	12 Months	12
Frame-Mate Door & Window Sealant	Water-resistant, high performance acrylic. Can be overpainted.	Int/Ext	Perimeter sealing of window and door frames. Not suitable PVCu.	10%	15 Years	N/A	White & Brown	12 Months	5
Glass-Mate Mirror Adhesive	Neutral curing silicone adhesive.	Interior	Bonding mirrors and glazed materials to most common surfaces.	N/A	25 Years	BS5889-A	Translucent	12 Months	5
GP200	DIY grade general purpose silicone.	Int/Ext	Multi-purpose, high modulus silicone rubber sealant with added fungicide. Suitable for most sealing jobs around the home.	25%	20 Years	BS5889-B (Except clause 9)	White, Translucent, Brown & Black	12 Months	7
HA6	Premium grade, RTV, high modulus, marine grade silicone. Contains no fungicides.	Int/Ext	General glazing and for use with marine joints and gaskets. Excellent heat resistance - up to 200°C.	20%	25 Years	ISO11600-G-20HM BS5889-B	White, Translucent, Grey, Black & Brown	12 Months	11
HT30	High modulus silicone. Heat resistant up to 300°C.	Int/Ext	Sealing industrial ovens, heating devices, flues and boilers.	25%	25 Years	ISO11600-G-20HM BS5889-B	Red	12 Months	12
LA5	Premium grade low modulus acetoxy silicone.	Int/Ext	General sealing work. Good adhesion to PVCu and plastics. UV and ozone resistant.	20%	25 Years	ISO11600-F&G-20LM BS5889-A	White, Translucent, Brown & Teak	12 Months	11
Lami-Mate Timber & Laminate Sealant	Polymer based flexible sealant & gap-filler. Can be overpainted, stained or varnished.	Interior	Sealing laminate and hardwood flooring and for draught proofing around timber to provide a dust and air tight seal.	15%	15 Years	N/A	Beech, Oak, Pine & Mahogany	12 Months	5
LN7	Premium grade, low modulus, neutral cure silicone. Gives off no corrosive vapours whilst curing.	Int/Ext	Perimeter sealing, high movement building & construction joint and potting compound to encapsulate electronic components.	25%	25 Years	ISO11600-F&G-25LM BS5889-A	White, Translucent, Black & Aluminium	12 Months	10
LN11	Fire resistant, neutral cure silicone. 4 Hour fire rating.	Int/Ext	Protection of engineered movement joints in buildings and fire resistant glazing.	50%	35 Years	BS476 PART 20	White	12 Months	11
Marine-Mate Aquarium Silicone	Solvent-free, silicone sealant & adhesive. Contains no fungicides.	Int/Ext	Aquarium manufacture. Also marine joints and gaskets.	N/A	25 Years	ISO11600-F&G-20HM BS5889-B	Translucent	12 Months	5
Multi-Mate Multi-Purpose Silicone	High modulus fungicidal silicone.	Int/Ext	General purpose sealant particularly in areas of high humidity. Ideal for most jobs inside and outside the house.	20%	20 Years	ISO11600-F&G-20HM BS5889-B	White, Translucent, Brown, Grey, Black & Bronze	12 Months	4
Pro-Mate Glazing Silicone	Low modulus acetoxy silicone.	Int/Ext	Sealing of PVCu window & door frames.	20%	20 Years	ISO11600-G-20LM BS5889-A	White, Translucent & Brown	12 Months	4
PU18	One part polyurethane adhesive and sealant.	Exterior	Sealing & bonding in construction engineering and transport industry.	20%	25 Years	N/A	White, Grey & Black	9 Months	12
PU600	One part polyurethane adhesive and sealant.	Exterior	Sealing & bonding in construction engineering and transport industry.	20%	25 Years	N/A	Grey	9 Months	12
PVC Seam Weld	Solvented PVCu adhesive and sealant.	Int/Ext	For jointing, filling and welding PVCu profiles.	N/A	25 Years	N/A	White	12 Months	12
Rain-Mate All Weather Sealant	Advanced formula. Adheres to damp surfaces. Paintable.	Exterior	General sealing work, particularly where moisture is present.	20%	25 Years	N/A	White, Clear & Black	12 Months	6
Roof-Mate Roof & Gutter Sealant	Butyl lap jointing sealant.	Exterior	Sealing gaps and cracks in roofs, down pipes and gutters.	5%	10-15 Years	N/A	Black	12 Months	6
Sanitary Sealant	High modulus fungicidal silicone.	Int/Ext	Bathrooms, kitchens and showers in both commercial and domestic applications.	25%	25 Years	ISO11600-F&G-20HM BS5889-B & ISO868	White, Clear & Ivory	12 Months	10
Ulti-Mate Builders Silicone	Low modulus neutral curing silicone.	Int/Ext	Perimeter sealing of all windows and doors. Adheres to all surfaces.	25%	25 Years	ISO11600-F&G-25LM BS5889-A	White, Trans, Brown, Ivory, Grey, Bronze, Black & Teak	12 Months	4
Weatherguard	Low modulus acetoxy silicone.	Int/Ext	Perimeter sealing of PVCu windows and doors. Fast set, non-yellowing & waterproof.	20%	25 Years	ISO11600-F&G-20LM BS5889-A	White, Translucent, Brown, Black	12 Months	10
WP70	Low modulus glazing silicone.	Exterior	General sealing & glazing silicone, ideal for sealing uPVC windows. Oxime Cure - Low Meko.	25%	20 Years	ISO11600-F&G-25LM BS5889-A	White, Translucent, Brown, Stone, Grey, Buff, Teak, Black & Toffee	12 months	7



Premiere Range



A premium quality range of sealants, polyurethane expanding foams

and ancillary products for the professional tradesman. Encompassing a range of high performance silicone sealants suitable for applications from glazing and building to automotive, high temperature and food grade installations.

Size: EU3 | Life: 25 Years | ← 25% → | Fungal Resistant

Sanitary Sealant

A high modulus, low maintenance, fungal resistant, silicone sealant. Contains a biocide to retard unsightly mould growth. Conforms to ISO11600-F-20HM, ISO868 and BS5889-B.

Application: Has excellent adhesion to ceramics, glass, melamine laminates and sanitary plastics. Should be used for sealing around worktops, basins, sinks; bed basins to vanity units and also to seal shower trays and shower units. It has been specially designed to seal in damp and humid areas. It is ideal for use on glass, ceramics, anodised aluminium, lacquered metals, painted timber, painted plaster, sanitary plastics, primed or painted concrete and primed metals. **Note:** When sealing metalised trims, test for discolouration prior to application.

Colours

WH	T	IV
----	---	----

PRODUCT CODE: BDS3

Size: EU3 | Life: 25 Years | ← 25% →

Weatherguard

A low modulus, acetoxy, silicone sealant that is fast setting, non-yellowing and waterproof. Has good UV and ozone resistance. WEATHERGUARD is suitable for use in domestic, commercial and industrial applications. Conforms to ISO11600-F&G-20LM and BS5889-A.

Application: Should be used to weatherproof the perimeters of inset frames in construction applications, to seal pipe and cable runs and as a lap sealant for preformed panels. It can also be used as a general construction sealant and a general purpose glass and ceramic sealant. It is ideal for use on aluminium, brick, ceramics, glass, GRP, primed metals and timber and many plastics. (adhesion levels should be tested to ensure satisfaction)

Colours

WH	T	BR	BL
----	---	----	----

PRODUCT CODE: BDWG4

Size: 310ml | Life: 25 Years | ← 25% →

LN7 LMN Silicone

The most versatile neutral cure sealant available. 100% pure silicone, this product gives off no solvents or corrosive vapours while setting and cures quickly under all conditions when exposed to air. Conforms to BS5889-A and ISO11600-F&G-25LM.

Application: Compatible with all metals and plastics and contains no components that can degrade insulating glass seals. It can also be used in construction, engineering and electrical applications and as a high extensibility sealant for external and internal applications, including expansion joints and perimeters of frames. Also suitable as a rubber adhesive for bonding most materials and as a potting compound to encapsulate electronic components to protect from moisture, tampering and shock. Finally LN7 is effective as a gasketing material and as a bedding compound for glazing double glazed units into timber frames. Ideal for use on glass, ceramics, all metals and sealed timber, marble, concrete, plastics, PVCu and polycarbonate and all painted surfaces.

Colours

WH	T	AL	BL
----	---	----	----

PRODUCT CODE: BDLN7

Premiere Range

Page Colour Guide:		(WH) White	(T) Transparent	(BR) Brown	(GR) Grey	(BZ) Bronze	(TK) Teak	(AL) Aluminium
TC -60 to +200	Size: 310ml	Life: 25 Years	← 25% →					

TC -60 to +200 | Size: 310ml | Life: 25 Years | ← 25% →

HA6 RTV Marine Silicone

A premium, high modulus, non-shrinking, marine quality silicone sealant and adhesive. It is unaffected by UV, ozone, salt water immersion and extremes of temperature and is non-slumping in paste form. HA6 contains no fungicides or oils which may leach into water. Conforms to BS5889-B and ISO 11600-G-20HM. Temperature stability: -60°C to +200°C.

Application: Recommended for bonding, bedding and sealing glass in aquarium construction. Also suitable for the manufacture of in-situ gaskets and seals for pumps and pipework to prevent water ingress and as a dust and weatherproofing seal for cabinets in dirty environments or external applications. It is ideal for use on glass, ceramics, anodised aluminium, primed metals and timber and many plastics.

Colours

WH	T	BR	GR
----	---	----	----

PRODUCT CODE: BDHA6

TC -60 to +200 | Size: 310ml | Life: 25 Years | ← 25% →

LA5 LMA Silicone

An extremely flexible, low modulus acetoxy (LMA), silicone sealant which has good adhesion, excellent weathering, UV and ozone resistance. Conforms to BS5889-A and ISO11600-F&G-20LM.

Application: Can be used to bond glass and weather/draught-proof door and window frames. It can also be used to seal solar collectors, curtain walls, air conditioning and glazing systems, perimeter sealing and cladding systems. It is ideal for use on glass, ceramics, aluminium, primed metals and sealed timber and polyester.

Colours

WH	T	BR
----	---	----

PRODUCT CODE: BDLA5



Size: 310ml | Life: 25 Years | ← 25% → | Fungal Resistant

FG8 Food Grade Silicone

A specially formulated silicone sealant for applications in the food machinery and food preparation industries. Contains a powerful and effective anti-fungal compound to prevent microbial growth on seals. The fungicide is approved by the US Food & Drug Administration (FDA) for food contact. Will also withstand sterilisation cycles and the extremes of heat and cold.

Application: Can be used to create waterproof seals and joints in machinery. To seal between ceramic tile and kitchen fittings and seal between walls and floors. It should be used to seal around deep freezers, refrigeration units and food processing machinery.

Colours

WH

PRODUCT CODE: BDGF8

Size: 900ml | Life: 25 Years | ← 7.5% →

AS900 Acoustic Sealant

A flexible joint filler, acoustic sealant and adhesive for plasterboard partitioning systems. A high quality acrylic sealant and adhesive with good adhesion to most common building materials.

Application: Suitable for interior sealing around dry wall partitioning to reduce noise transmission and for cracks and joints with low movement. It can also be used for sealing interior skirting boards and fixing plasterboard into partition systems to reduce vibration and movement.

Colours

WH

PRODUCT CODE: BDAS900

Size: 310ml | Life: 35 Years | ← 50% →

LN11 Firescreen Silicone

A fire resistant, neutral cure, silicone for the protection of engineered movement joints in buildings. LN11 maintains the integrity of fire walls when breached by conduits, pipes, etc. and prevents the spread of flame, smoke, toxic gases and water. Halogen free to reduce the risks of toxic fumes and corrosion in the event of fire. This product offers up to 4 hours fire and smoke protection. Conforms to BS476 pt 20.

Application: For sealing panels, door frames, partitions and cap beading of protective fire glazing. Suitable for use on concrete, cement, all kinds of metals, timber, glass, ceramics and many plastics. Has all the benefits of a silicone rubber sealant, including sealing and waterproofing.

Colours

WH

PRODUCT CODE: BDLN11



Premiere Range

Page Contents: Specialist Sealants

Fireshield AC Intumescent Acrylic Sealant
Intumescent acoustic acrylic sealant and adhesive. When subjected to heat the sealant swells (intumesces) to provide an inert barrier to smoke and flames. It has non-slumping and rapid skinning properties. Conforms to BS EN 140 pt 3; BS EN 20140 & BS 476 pt 20.
Note: The fire resistance achievable with FIRESHIELD AC depends upon the joint design, depth of sealant and substrates being sealed.

Application: Specially manufactured to form an acoustic and fire rated intumescent barrier in construction applications i.e. floor and ceiling joints, dry lining systems, partition walls, etc. It can also be over-painted within 1 hour with an appropriate paint.

Colours

WH	BR
----	----

PRODUCT CODE: BDFWH **PRODUCT CODE:** BDFBR **PRODUCT CODE:** BDFWH9

HT30 High Temperature Silicone
A ready-to-use, acetic curing, silicone sealant. Specifically designed for high temperature use, it is UV resistant and weatherproof. After curing HT30 will resist temperatures of 250°C permanently and up to 300°C for short periods.

Application: Generally used for sealing joints which are exposed to high temperatures, i.e. connections on ovens, heating systems, machines, car bodies (vicinity of engines), etc. HT30 does not lose its sealing properties under extreme conditions. It can be applied to glass, ceramic tiles, enamel, epoxy paint and polyester. It can also be used with polyamides, ABS, metals and polyester in immersion or humid heat, however, a primer may be required.

Colours

R

PRODUCT CODE: BDHT30

PU18 Polyurethane Adhesive & Sealant
A one-part moisture curing polyurethane adhesive and sealant, with a shore hardness of 35, for the construction and transport industries. PU18 produces tough, elastic seals and joints with excellent adhesion characteristics which helps dampen vibration. Also oil resistant making it ideal for the engineering industry. Conforms to ISO11600.

Application: Can be used for sealing and bonding in engineering, construction, automotive and marine applications. It is ideal for use on concrete, wood, metals, GRP, rubbers and most common building materials. It is also suitable for fixing wooden floors.

Colours

WH	GR	BL
----	----	----

PRODUCT CODE: BDPU18

PVC Seam Weld
A one-part, gap-filling adhesive for PVC and PVCu joints, which works by a chemical reaction with the plastic forming an unbreakable weld. When fully cured this product will give a water-resistant colour-fast seal. Has good weathering characteristics and UV and chemical resistance.

Application: Ideal for use in the window industry for the installation of frames and attachments. Suitable for use on most porous substrates, such as brickwork.

Colours

WH

PRODUCT CODE: BDSWWH

AS10 LMN Silicone
A low mod, neutral cure silicone sealant for use by professional sealant applicators and in the glazing industry. Specially formulated for easier tooling and durability once cured. Conforms to ISO11600-F&G-25LM.

Application: Primarily developed for sealing expansion joints. Suitable for sealing non-porous materials such as PVCu, aluminium, metal cladding, glass, curtain walling, brickwork, wood (painted and unpainted) and Lead.

PRODUCT CODE: BDAS10

Colours

WH	MG	TK	BL	GR	BD	AN	BU	ST
----	----	----	----	----	----	----	----	----

PU600 PU Adhesive & Sealant
Polyurethane adhesive and sealant supplied in a 600ml sausage version for more economical use.

Product Codes: BDPU600GR BD600SG **Applicator:** Grey 600ml

Colours

GR

PRODUCT CODE: BDEFB2

Premiere Range

Page Contents: PU Foam Foam Applicators

Page Colour Guide:												
(WH) White	(T) Transparent	(BD) Brick Red	(GR) Grey	(BG) Beige	(PK) Pink	(BU) Buff	(ST) Stone	(MG) Magnolia	(AN) Anthracite	(BL) Black	(TK) Teak	(R) Red

B1 FIRE FOAM **Can Yield upto 40 Litres** **Size: 750ml**

Fire Resistant Expanding PU Foam
A high performance, polyurethane expanding foam, fire rated and tested to BS476 Part 20 (the most stringent test for fire rated products). Seals irregular gaps and expands to over 40 times its can volume. This foam can be used at temperatures from +5°C to +25°C. The cured foam is semi-rigid and predominantly close-celled. It is resistant to temperatures ranging from -40°C to +100°C and to ageing, but not to UV-rays. Noise and heat insulation values are excellent. Available in gun grade or aerosol versions.

Application: Window setting (where a clean and controlled backfill is required), entrance door linings, any kind of small break-throughs in walls and other cavities.

Colours

PK

PRODUCT CODE: BDEFR750

This foam exceeds the requirements of Construction Materials Class B1 rating in accordance with DIN 4102 Pt 1.

B2 FIRE FOAM EXPANDING FOAM
Conforms to Class B2 DIN 4102 Part 1. Quick curing • Expands up to 40 times the can volume • For filling, fixing & insulating. Available in hand held and gun grade versions.

Gun Grade: BDEFGB2 **Straw Version:** BDEFB2

NEW PRODUCT

PRODUCT CODE: B2 FIRE FOAM

Foam Applicators

Heavy Duty Foam Applicator (AK45)
A professional gun for delivering polyurethane foam. Made entirely of metal, it is robust and easy to handle with its ergonomic handgrip made of anti-solvent nylon. Body, adaptor and nozzle is teflon coated to prevent foam from sticking to the gun and facilitate cleaning. Exceptionally hard wearing gun parts - this is a gun for life!!

PRODUCT CODE: BDAK45

Professional Gun Foam Applicator (AG1)
A top quality metal gun for use with gun grade PU expanding foams. Screws onto gun grade canister for quick and easy application. Heavy duty for professional use.

PRODUCT CODE: BDAG1

Expanding Foam Gun Cleaner
A solvent-based solution for effective cleaning of expanding foam applicator guns and removal of uncured foam. Regular cleaning prolongs service life of applicator and optimises foam delivery.

Colours

T

PRODUCT CODE: BDCF1

Size: 500ml & 750ml **Can Yield upto 40 Litres**

Mega Foam
A high performance, polyurethane expanding foam available for use as an aerosol grade using the adaptor or by simply fixing a gun applicator can be used as gun grade. Quick, economic and easy to apply for fitting doors, windows and insulating pipes and filling gaps. Improves draught and heat insulation. Fitted with a new, unique valve which allows for multi-directional use.

- Can be used at 360°
- High Yield with less waste
- Twice the life of a standard can
- Problem-free valve
- Fills holes and seal gaps

Application: Window setting (where a clean and controlled backfill is required), entrance door linings, any kind of small break-throughs in walls and other cavities. Exceeds Class B3 (Foam rating for products with no fire resistant additives or properties).

Hand and Gun Grade in 1 Can

PRODUCT CODE: BDEF750

PRODUCT CODE: BDEF500

Mate

Premiere

Adhesives

Tile Adhesives

Builders

Bitubond

Xtreme

Plumbing

Flooring



Ancillary Products

Anchor Bond Gun
A high quality gun for extruding Anchor Bond Resin Anchoring System (380ml). (See page 17).

Size: 380ml

PRODUCT CODE: **BDABG3**

Speed Clamps
Economy clamps for speedy clamping of most materials. Pump action, quick to fit, robust construction.

Size: 6" & 4"

PRODUCT CODE: **BDSC6**

PRODUCT CODE: **BDSC4**

Professional Applicator Guns
A high quality, PC Cox extruder gun for use with cartridge based products. Features hexagonal drive bar for improved control.

Sizes: 400ml

PRODUCT CODE: **BDBC400**

Economy Sealant Guns
An economy extruder gun for use with cartridge products. All guns have hexagonal drive bar for improved control. Available in 3 Sizes.

Sizes: 300ml, 400ml & 900ml

PRODUCT CODE: **BDCG900**

PRODUCT CODE: **BDCG400**

PRODUCT CODE: **BDCG300**

Pro Plus Heavy Duty Extruder
A heavy duty, high quality 10.5" (400ml) metal extruder for use with cartridge products. Robust construction with rotating barrel.

Size: 400ml

PRODUCT CODE: **BDHDG**

Adhesives Range



Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

Plumbing

Flooring

Adhesives Range



Gripbond SF

Offering less impact on the environment this solvent-free, advanced technology formula offers instant grab and a tough permanent bond on virtually any porous or non-porous surface. Gripbond SF is a low odour, water clean up, construction adhesive which cures to form a high strength bond. Extremely low VOC content, contains no harmful raw materials, making it safer for the environment, safe for the user and safe on substrates.

Note: Recommended for internal use only.

NEW IMPROVED FORMULATION

Application: Ideal for fixing panelling, plasterboard, cove base, window sills, styrofoam, carpet tack strips, aluminium furring strips, tub surrounds, fireplaces, loose floor/wall tiles, plywood, aluminium, steel, wood, concrete, cork, general repairs to wood, fixing hardboard and plywood and as a general adhesive.

Colours

White

12 Tube Carton: **BDPGE**

Gripbond

Size: 350ml
Bridges gaps upto \leftarrow 12mm \rightarrow

A multi-purpose, synthetic rubber based construction adhesive that can replace mechanical fixings in a wide variety of domestic, commercial and industrial applications. A fast bonding, non-slumping, instant grab adhesive with good gap-filling properties even on uneven surfaces. It can be used in all weather conditions and is suitable for rough and porous surfaces. It can also be over-painted once dry.

Application: Ideal for fixing a wide variety of materials. It can be used to fix skirting boards, door surrounds and frames, window sills, all types of cladding, wall battens, decorative wall boards, metal carpet edges, automotive trims and much more. It can be used for interior and exterior applications.

Note: this product is Toluene free!

12 Tube Carton: **BDGB12**

24 Tube Carton: **BDGB**

Boxed in a striking merchandising carton for added display impact and easy dispensing.

Aerosol Spray Adhesive

Size: 500ml

Gives exceptionally strong adhesion for a wide range of demanding uses. Fitted with a variable discharge spray that controls the width of the fan.

Application: It is ideal for perimeter bonding of carpet tiles and minor flooring installations, and for use in the furniture and automotive industries, especially for bonding foam to a variety of surfaces. Also suitable for use in repair and non-structural applications where a high strength bond is required.

Colours

Beige

PRODUCT CODE: **BDA007**

Adhesives Range

Anchor Bond

Size: 380ml & 150ml

A polyester resin, 2-part, rapid curing, chemical anchoring system. Applied in one single action to produce a cost effective, tough chemical resistant fixing.

Application: Suitable for setting bolts, studs, wall ties, starter bars or large screws, etc. into a wide range of substrates. Compatible with brickwork, concrete, masonry, stone and aerated concrete blocks. Ideal for close-to-edge applications (unlike expansion anchors) as no stress is placed on the surrounding substrate. Full cure is obtained after 2 hours. Specialist extruder available for 380ml cartridge.

Note: Spare nozzles are available (sold in bags of 10).

Colours

Grey

PRODUCT CODE: **BDAB150**

PRODUCT CODE: **BDAB380**

PRODUCT CODE: **BDABG3**

Duo "2 in 1" Wood Glue

Sizes: 125ml, 250ml, 500ml, 1L, 2.5L, 5L, 25L, & 200L

Developed using the latest fast drying, water resistant, PVA technology, this product achieves a bond strength stronger than the wood itself. A cost-effective, water-resistant wood adhesive that conforms to the requirements of category D3/3 and D3/4 of EN204. In addition, it also meets the resistance to sustained load (creep test) requirements of BS 4071 "Polyvinyl Acetate (PVA) Emulsion Adhesives for Wood".

Application: Designed as a one-pack, ready-to-use adhesive which gives a fast rate of bond strength development. Suitable for hard and soft woods, decorative laminates, chipboard blockwood and other engineered timber panels. Can be used in applications where joints may be subjected to short term water contact or exposure to high humidity i.e. kitchen work surfaces, window frames, doors and stairs. Suitable for interior & exterior applications.

Product Codes: **BDA050, BDA051, BDA052, BDA053, BDA054, BDA055, BDA056, BDA057**

Colours

White

CONTACT ADHESIVE

Size: 500ml, 1L & 5L

A premium grade, solvent-based, neoprene adhesive with high grab and long open time to enable re-positioning. Easily applied (500ml and 1L containers come complete with handy brush applicator).

Application: Can be used for bonding to cork, leather, rubber, metals, wood, chipboard, hardboard, laminated plastics (e.g. Formica), dense textiles, plaster, stone, concrete, cementitious screeds and smoothing compounds. It will bond rigid PVC and PVCu sheets but the materials should be checked for suitability prior to application as plasticiser migration can occur in some instances.

Note: This product is not suitable for polystyrene, polythene, polypropylene, silicone rubbers, bitumen or PTFE. The solvent in the contact adhesive may attack certain painted or lacquered surfaces. Test a small area of adhesive on the surfaces prior to full application. 5L lever lid tin now available.

Colours

Beige

PRODUCT CODE: **BDA002**

PRODUCT CODE: **BDA003**

PRODUCT CODE: **BDA001**

Builders


Bitubond

Xtreme

Plumbing

Flooring

Adhesives Range

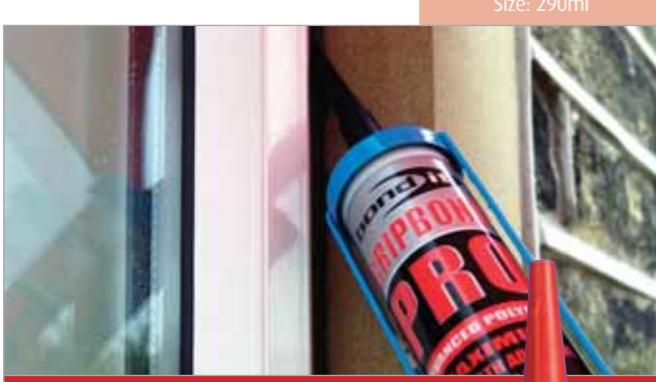

Gripbond Pro

A one part, high quality, high modulus sealing and bonding material based on MS polymer technology. A totally neutral "hybrid" sealant for use in areas requiring a tough elastic rubber joint or as an adhesive with superior bonding strength. Conforms to ISO11600-20-HM.

Properties

- High modulus, remains permanently flexible.
- For sealing and bonding interior and exterior applications in all weather conditions.
- Can be over-painted with waterbased paints (alkyd resin based paints may slow down drying process - test a small area before application.)
- Non staining (excellent for use on natural stone).
- Non shrinking.
- Contains no isocyanates, solvents, silicone and phthalates.
- Rapid curing.
- Resistant to UV radiation, water (including sea water), mould and chlorine.
- Excellent adhesion to most surfaces (even moist surfaces).
- Will not discolour surfaces.
- Wet on wet application.
- No odour.

Application: GRIPBOND PRO can be used:

- For filling and sealing of connecting joints, cracks, holes, etc in the building sector.
- For wooden joints in ship decks.
- For bonding metal to metal (can absorb vibration).
- As a high quality glazing sealant including for use with burglar safe glazing systems.
- As a universal waterproof construction adhesive for bonding stone, concrete, mirrors (with an acetone resistant backing), natural stone, marble, gypsum board, polycarbonates, polystyrene, PVC, many plastics, ceramics, copper, lead, zinc, aluminium, stainless steel, wood and glass.

Note: This product is not recommended for use with expansion joints or for installations where the joints are continually immersed in water. If allowed to cure in dark conditions or poor light the product may yellow.

Colours

White	Black	Grey
-------	-------	------



Size: 290ml

Size: 750ml

Mega Stick Polyurethane Construction Adhesive

A fast curing, adhesive foam that has been specially developed for the rapid installation of plasterboard, insulation boards, floorboards and roof decking. Supplied in an aerosol can, the product can be used with a standard foam gun. A multi-purpose, polyurethane construction adhesive in a can - but not just a drywall adhesive. The cured adhesive is an excellent heat insulator and has exceptionally good adhesion properties. Can also be used to dampen sound.

Application: Adheres well to most building materials, with the exception of Teflon, polyethylene and silicone surfaces. Suitable for installing doors and windows, insulating and fixing pipes, filling holes and gaps, fixing wall panels, skirting boards, roof tiles, decking and for thermal insulation.

- No mixing, no mess, no water, no dust!
- No need to carry heavy bags of plaster.
- One can fixes approximately 5 standard plaster boards.
- 30% time saving over conventional dry wall adhesives.
- Can be plastered in 1 hour.
- Can be applied direct to boards or the wall.
- Can work on solid walls, metal and timber studding.
- No nails or screws required.

Product Codes: BDEFMS



NEW PRODUCT

Contractors Grade PVA

An all purpose, premium quality primer, sealer and bonding agent that dries quickly to a high bond strength.

Application: Can be used with plaster, cement, timber, gypsum wall boards and paper. Properties as an adhesive include fast drying. It is also a readily dilutable primer for sealing applications or addition to cement and plaster to improve adhesion and cure.

- High solids content compared with other contractor grades.
- Solids content is all polymer - no fillers are used!
- Better water resistance.
- Better adhesion and flexibility.
- Better drying at low temperatures.

Product Codes: BDAC1, BDAC5, BDAC25, BDAC200

Size: 1L, 5L, 25L & 200L



SPECIAL PALLET DEALS AVAILABLE

PVA Adhesive & Sealer

A high performance sealer, primer, dust-proofer and bonding agent. Improves adhesion and reduces cracking in cements and plaster. Primes and seals porous surfaces. Quick drying, durable and has a very high bond strength. Conforms to BS5270.

Application:

- Plaster primer, porous surface primer and sealer.
- Rendering key coat for internal applications.
- Admixture.
- Dust sealer.
- General purpose adhesive for bonding all common construction materials.

Product Codes: BDA021, BDA022, BDA023, BDA024, BDA025, BDA026



Size: 500ml, 1L, 2.5L, 5L, 25L & 200L



Page Contents: Specialist Glues

Adhesives Range

Gripbond Pro

A one part, high quality, high modulus sealing and bonding material based on MS polymer technology. A totally neutral "hybrid" sealant for use in areas requiring a tough elastic rubber joint or as an adhesive with superior bonding strength. Conforms to ISO11600-20-HM.

Properties

- High modulus, remains permanently flexible.
- For sealing and bonding interior and exterior applications in all weather conditions.
- Can be over-painted with waterbased paints (alkyd resin based paints may slow down drying process - test a small area before application.)
- Non staining (excellent for use on natural stone).
- Non shrinking.
- Contains no isocyanates, solvents, silicone and phthalates.
- Rapid curing.
- Resistant to UV radiation, water (including sea water), mould and chlorine.
- Excellent adhesion to most surfaces (even moist surfaces).
- Will not discolour surfaces.
- Wet on wet application.
- No odour.

Application: GRIPBOND PRO can be used:

- For filling and sealing of connecting joints, cracks, holes, etc in the building sector.
- For wooden joints in ship decks.
- For bonding metal to metal (can absorb vibration).
- As a high quality glazing sealant including for use with burglar safe glazing systems.
- As a universal waterproof construction adhesive for bonding stone, concrete, mirrors (with an acetone resistant backing), natural stone, marble, gypsum board, polycarbonates, polystyrene, PVC, many plastics, ceramics, copper, lead, zinc, aluminium, stainless steel, wood and glass.

Note: This product is not recommended for use with expansion joints or for installations where the joints are continually immersed in water. If allowed to cure in dark conditions or poor light the product may yellow.

Colours

White	Black	Grey
-------	-------	------



NEW PRODUCT



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Size: 750ml



Size: 290ml



Decorators Range

Page Contents:

Sealants & Fillers
Quick Set Epoxy

Squeeze It Saves Nails Adhesive

A premium, multi-purpose, gap-filling adhesive. Water based, totally solvent-free with quick grab properties, that cures to give a tough, durable and permanent bond.

Application: Can be used to replace or augment mechanical fixings with most materials including polystyrene. Ideal for fixing batons, cladding, countertops, dry wall partitioning, mouldings and dado rails, mirror tiles, trims and wall boards. Also an excellent adhesive for bonding stair nosings, gripper rods and general construction work.

Colours

White

PRODUCT CODE: BDSQSN2

Squeeze It Bath & Kitchen Sealant

A permanently flexible acrylic sealant that forms a watertight bond to all surfaces. Contains a powerful anti-fungal compound to retard mould growth. Easy to apply with water clean up.

Application: Suitable for use as an easy-to-apply grout repair. Also for sealing around all types of baths, basins and sinks. Adheres to plastics, ceramics, plaster and wood. **Note:** Do not use in areas subject to standing water or subject to continuous water immersion.

Colours

White

PRODUCT CODE: BDSQBA

Squeeze It Flexible Filler

A permanently flexible, quick drying interior decorators filler that can be over-painted within 1-2 hours of application. Adheres to most surfaces and remains permanently flexible to prevent unsightly cracks developing after decorating.

Uses: For sealing and filling gaps and cracks between two dissimilar surfaces where movement is likely to occur, such as skirting boards, ceilings, stair risers, interior door frames, fitted furniture, pipe-work and light fittings. Also for filling interior cracks and damage in plaster, brick, concrete and plasterboard.

Colours

White

PRODUCT CODE: BDSQDM

Squeeze It Frame Sealant

A high performance, acrylic frame sealant that offers outstanding weathering, durability and excellent adhesion. Remains permanently flexible and is suitable for use with most building materials.

Application: For pointing and sealing timber and aluminium window and door frames. Suitable for use with brick, stone, concrete and pre-formed panels. Will also seal gaps and cracks in exterior timber structures, bricks, stone and concrete. Ideal for sealing, waterproofing and draught-proofing applications in domestic and commercial areas. **Note:** not for use with PVC.

Colours

White

PRODUCT CODE: BDSQFM

One Hit Wonder Lightweight Filler

PRODUCT CODE: BDLWF05
PRODUCT CODE: BDLWF1
PRODUCT CODE: BDLWF4

A specially formulated, ready mixed compound consisting of millions of tiny glass bubbles that will fill most holes and gaps in a single application. Gives a super smooth, brilliant white finish that does not require sanding.

Application: Suitable for use internally and externally, on uneven surfaces for delicate repair work and in areas which are difficult or awkward to fill e.g. ceilings. Effective for filling large holes in a single application as it is non-slumping and shrink resistant, which reduces the need to build up layers of filler. This ready-to-use paste is suitable for use on: • plaster • concrete • brick • wood • stone. **Note:** This product is not suitable for use in areas subject to continuous water immersion.

Colours

Brilliant White

Quick Set Epoxy Adhesive

A rapid curing, general purpose adhesive, encapsulant, that forms a clear, hard, rigid bond or coating in minutes. 5 minute fixture time. Cures fast for quick metal-to-metal bonding.

Application: Can be used to bond metal, fabric, ceramic, glass, wood & concrete. It will also seal against dust, dirt and contamination. Fast-curing, thin set, bonding above 15°C. Adhesive must be applied using the syringe only - it is essential that the resin and hardener are mixed thoroughly for the cure process to develop to the stated strengths.

Colours

Beige

PRODUCT CODE: BDAE56

Bonds2 Range

Page Contents:

DIY Superglues

All Purpose Adhesive

A quick drying, clear adhesive with exceptional bond strength, suitable for a variety of household repairs, DIY, craft, hobby and office applications.

Application: Will bond wood, metal, ceramics, porcelain, most plastics, cork, rubber, stone, glass as well as craft materials such as card, paper, leather and fabric. Bonds to full strength in approximately 24 hours. **Note:** see packaging for limitations.

PRODUCT CODE: BDGGP



PRODUCT CODE: BDGGS

Hot Melt Glue Gun

PRODUCT CODE: BDGGP

Standard Hot Melt Glue Gun

PRODUCT CODE: BDGGP

Contact Adhesive

A specially formulated, water resistant contact adhesive with exceptional bond strength that dries in minutes.

Application: It is ideal for DIY jobs and household repairs and is suitable for use with rubber, leather, wood, metal, most plastics, cork, laminates and much more. Bonds to full strength in approximately 24 hours. **Note:** see packaging for limitations.

PRODUCT CODE: BDCCA



Superglue

An all purpose, premium grade cyanoacrylate adhesive, that provides a high strength, rapid bond to almost any surface or materials.

Application: It will bond metals, wood, ceramics, plastic, porcelain, leather, cardboard, and much more. Surfaces to be bonded must be a perfect fit; adhesive will bond within 30 seconds. **Note:** Take care when aligning the treated objects as once the surfaces have been brought together an instant bond will be formed.

PRODUCT CODE: BDCSGA



Hot Melt Glue Sticks

PRODUCT CODE: BDGST8

Hot Melt Glue Sticks

PRODUCT CODE: BDGST4

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders


Bitubond

Xtreme

Plumbing

Flooring

Tile Adhesives & Grouts

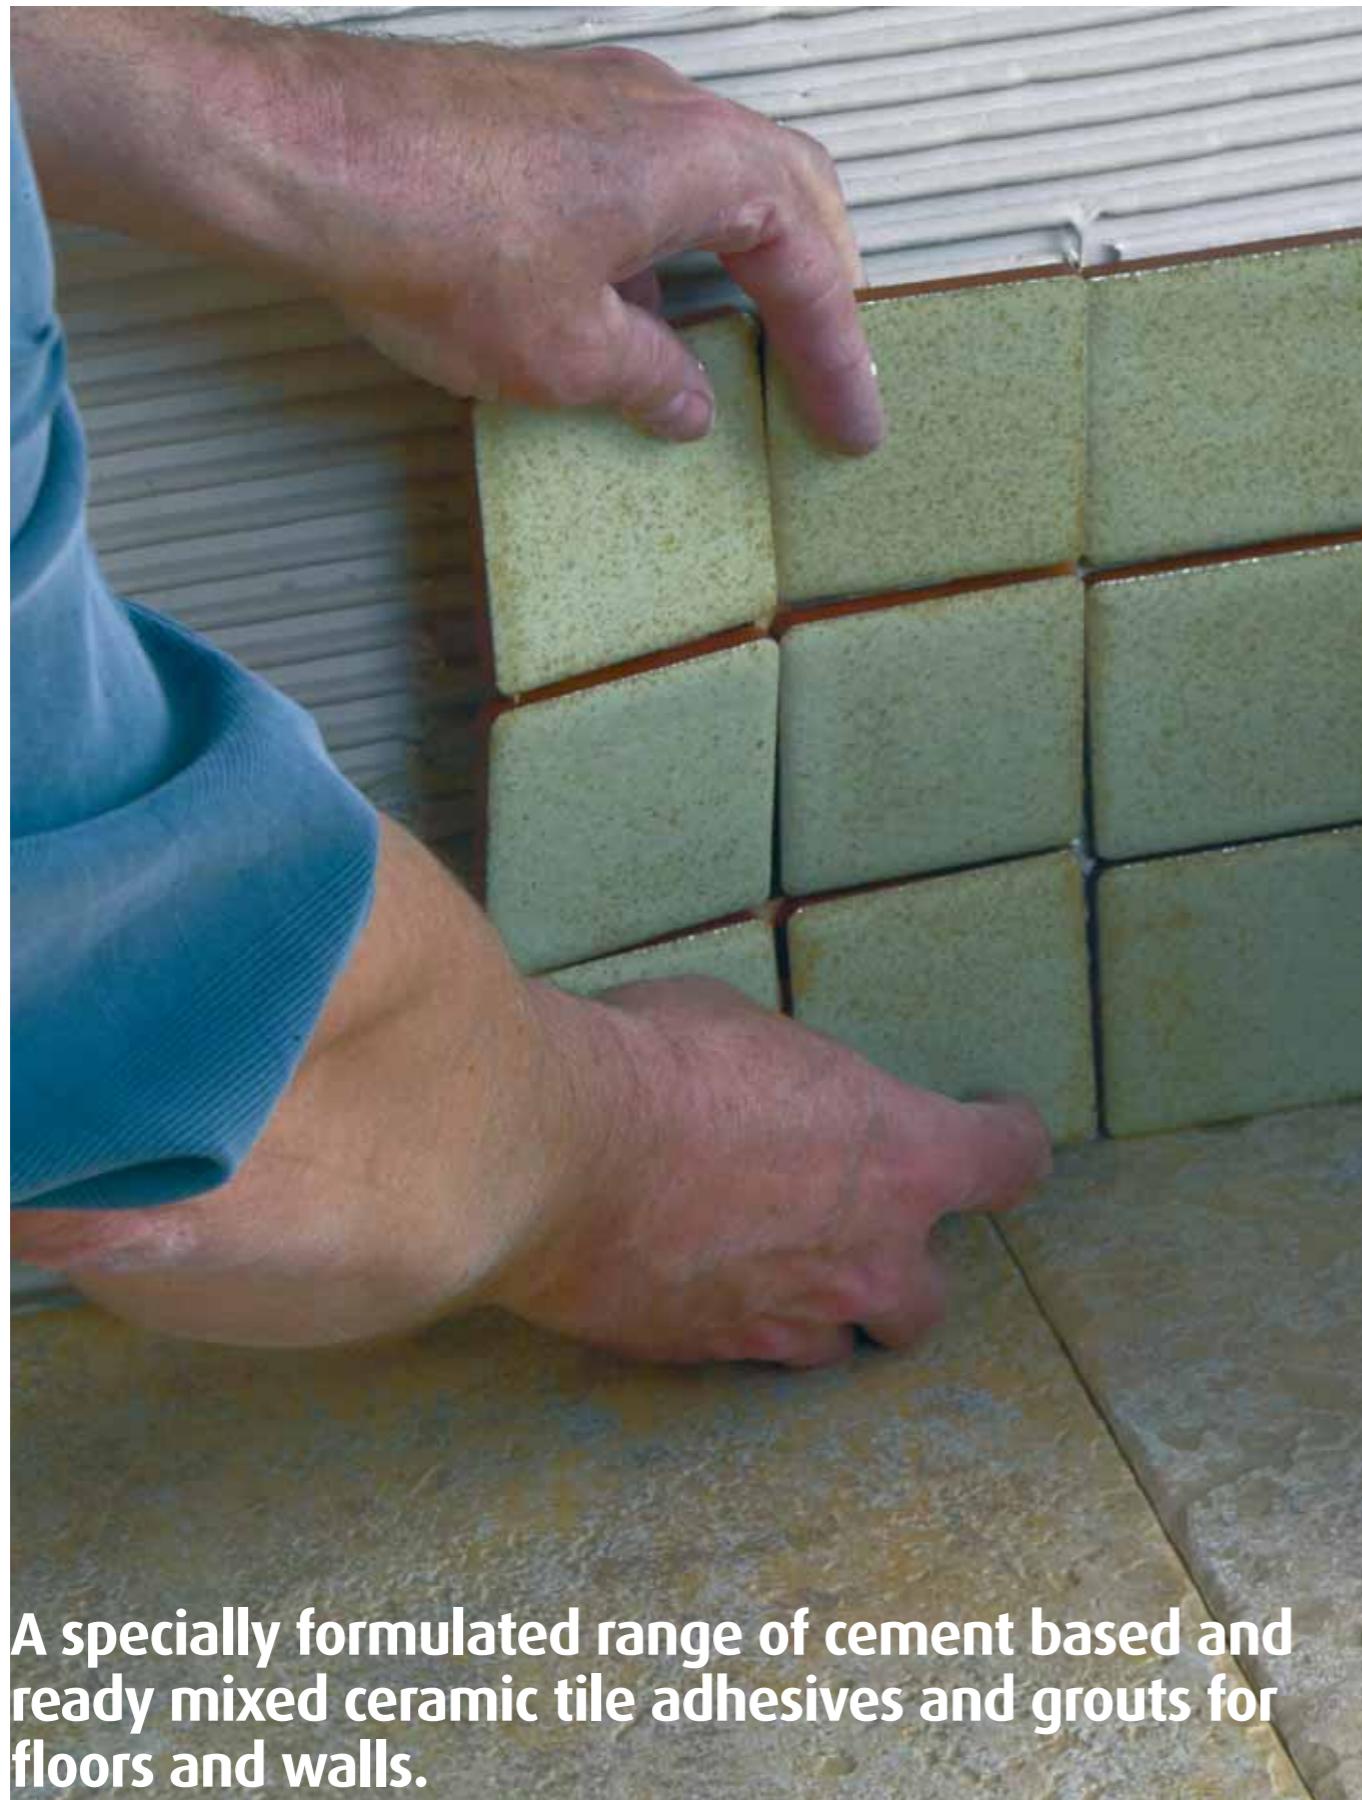

A specially formulated range of cement based and ready mixed ceramic tile adhesives and grouts for floors and walls.

Page Contents:

Ready Mixed
Tile Adhesives

Page Contents:

Ready Mixed
Tile Adhesives

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

plumbing

Flooring

Tile Adhesives & Grouts

Size: 15kg, 7.5kg & 3.75kg

Aqua-Tile



An off-white, ready mixed, water-resistant, instant grab tile adhesive that can be used as an all round interior grade ceramic wall tile adhesive. Has excellent bond strength and good coverage rates.

Application: Suitable for use in power showers, kitchens, bathrooms, etc, provided it is used with a waterproof grout. It embodies unique 'non-slip' properties but allows for adjustment while fixing; in most cases this eliminates the use of battens.

Note: It is unsuitable for swimming pools or other areas subject to total immersion. Not suitable for use with large format tiles.

BS En Conformation: Type D Class 2T and BS5980 Type 2 Class AA

Colours

Off White

Size: Trade, 7.5kg & 1.5kg

Super-Grip



An off-white, waterborne, ready mixed adhesive paste, for use as an all round interior grade ceramic wall tile adhesive. Has a high spreadability rate.

Application: Suitable for use in domestic showers, kitchens, bathrooms, etc, provided it is used with a waterproof grout. It embodies unique 'non-slip' properties but allows for adjustment while fixing; in most cases this eliminates the use of battens.

Note: It is unsuitable for swimming pools or where prolonged wet conditions exist. It should also not be used with porcelain tiles or in areas subject to rising or penetrating damp. Not suitable for use with large format tiles.

BS En Conformation: Type D Class 1T and BS5980 Type 2 Class B

Colours

Off White

Size: 15kg

Gripbond CTA



A premium quality, off-white, waterborne, ready mixed adhesive paste for wall tiles. Manufactured from the latest terpolymer technology, it is suitable for use as an all round interior grade ceramic wall tile adhesive. Has superb grab and non-slip characteristics.

Application: Can be used in domestic showers, kitchens, bathrooms, etc. provided it is used with a waterproof grout. It embodies unique 'non-slip' properties but allows for adjustment while fixing; in most cases this eliminates the use of battens. **Note:** This product is unsuitable for use in swimming pools or where prolonged wet conditions exist. It should also not be used with porcelain tiles. Do not use in areas subject to rising or penetrating damp. Not suitable for use with large format tiles.

BS En Conformation: Type D Class 1T and BS5980 Type 2 Class B

Colours

Off White

Wood-Flex



A grey, acrylic based, ready mixed coarse thixotropic paste, for use as a thin-bed ceramic floor tile adhesive. Suitable for fixing all types of ceramic floor tiles, including mosaics, porcelain and vitrified tiles in internal locations where slight movement or vibration is likely.

Application: Ideal for applications onto timber panels, plywood, composite boards, as well as tongue and groove floorboards and floating plywood floors. Gives excellent flexural strength and water resistance and can be applied to porous masonry surfaces, such as old concrete and sand/cement screeds. It can make a convenient alternative to traditional cement based floor tile adhesives and grouts, however it is a slower drying product, both as an adhesive and a grout. Woodflex is not suitable for use in external applications or where the tiled area may be subject to complete water immersion.

BS En Conformation: Type D Class 2T and BS5980 Type 2 Class AA

Colours

Grey



Tile Adhesives & Grouts

Page Contents:
Ready Mixed and
Cement Based Grouts

Fix 'N' Grout

Size: 3.75kg & 1.5kg

PRODUCT CODE: BDTA11

PRODUCT CODE: BDTA10

A brilliant white, ready mixed adhesive paste, for use as an all-purpose thin-bed waterproof ceramic wall tile adhesive and joint filling grout. Suitable for fixing all types of ceramic wall tiles, including mosaics, porcelain and vitrified tiles in internal locations.

Application: Recommended for use in areas such as bathrooms, kitchens and shower areas, where the tile surface is subject to frequent wetting, but not total water immersion. Can be applied to gypsum plaster, cement fibreboard, existing tiles, cement render, timber panels and plywood composite boards. It is recommended for use in areas such as shower/ changing rooms, power showers, work tops and any tiled wall surface which is subject to persistent humidity. The dual purpose application properties of FIX 'N' GROUT make it particularly suited to small area DIY applications and localised repairs. Not recommended for use with large format tiles.

BS En Conformation: Type D Class 2T and BS5980 Type 2 Class AA

Colours

Brilliant White



← 3mm - 10mm → Size: 10kg & 5kg

Floor Tile Grout

A cement-based, joint filling compound for floor tile joints from 3mm up to 10mm wide around all types of ceramic tiles. Formulated to provide a flowable, readily compactable grouting slurry, which can be easily applied across all types of ceramic tiled surfaces. Sets to a hard, durable, waterproof finish, suitable for interior and exterior applications, including swimming pools.

PRODUCT CODE: BDFTG5

PRODUCT CODE: BDFTG10

Conforms to: EN 13888:2002 Type CG Class 1

Colours

Grey



← Up to 3mm → Size: 10kg, 5kg & 1kg

Wall Tile Grout

A cement-based, joint filling compound for tile joints up to 3mm wide around all types of ceramic wall tiles. Sets to a hard, durable, water-resistant finish, suitable for interior and exterior applications.

Application: Ideal for all types of ceramic tiled surfaces. This product is waterproof making it suitable for both internal and external applications, including swimming pools

PRODUCT CODE: BDWTG1

PRODUCT CODE: BDWTG2

PRODUCT CODE: BDWTG3

Conforms to: EN 13888:2002 Type CG Class 1

Colours

High White Ivory

← 3mm - 20mm → Size: 10kg

Flexible Wide Joint Grout

A cement-based, highly polymer modified, joint filling compound for tile joints from 3mm up to 20mm wide around all types of ceramic floor and wall tiles. A specially formulated grouting compound for applications where tiles have been fixed with either a standard or flexible adhesive and where some slight degree of surface movement or vibration is anticipated. Provides a flowable, readily compactable grouting slurry, that produces stable floor tile joints without shrinking or cracking. WIDE JOINT GROUT will set to a hard, durable, waterproof finish, suitable for interior and exterior applications and also in fully immersed locations such as swimming pools.

PRODUCT CODE: BDFXG

Specification Type: EN 13888:2002 Type CG Class 1

Colours

Grey Sandstone Charcoal Ivory



Tile Adhesives & Grouts

Page Contents:
Cement Based
Adhesives
Primers



Size: 20kg & 10kg

CTA (Ceramic Tile Adhesive)

A white, water and frost-resistant ceramic floor and wall tile adhesive. Cement based powder which offers excellent non-slip characteristics and good adhesion to most substrates.

Application: For fixing all types of ceramic floor and wall tiles, mosaics, cladding brick slips to concrete, render, brick work and block work. Can be used on timber panels, composite boards and impermeable surfaces, however, addition of a latex acrylic additive is recommended to improve flexural strength. Suitable for interior and exterior use, particularly swimming pools, showers, saunas and bathrooms.

PRODUCT CODE: BDCTA10

PRODUCT CODE: BDCTA20

BS EN Specification: Type C Class 1T

Colours

White



Size: 5L

Primer and Flexible Admix

A specially formulated acrylic dispersion for use as a primer prior to tiling or as an additive to cement based tiling products to improve adhesion and flexibility. As a primer it will prepare and stabilise porous and dusting surfaces prior to tiling and to improve adhesion on difficult substrates, such as vinyl tiles, timber, asphalt and terrazzo, etc. Also prevents swelling of timber, plasterboard and MDF. As an admixture it will improve the flexibility and adhesion of cement based adhesives and grouts in situations subject to slight movement or vibration.

Application: Refer to datasheet for application details.

Colours

White



Size: 20kg

CTA Flexible

A white, thin-bed, ceramic tile adhesive with excellent non-slip characteristics. Forms a strong bond to fully vitrified tiles and is ideal for tile-on-tile work. Its flexibility allows it to be used on backgrounds subject to limited movement, flexing or vibration. CTA FLEXIBLE is completely waterproof, frost-resistant and is suitable for interior and exterior use, particularly swimming pools, showers, saunas and bathrooms.

Application: For fixing all types of ceramic floor and wall tiles, porcelain, mosaics, natural stone and similar wall and floor finishes. Can also be used on timber panels, composite boards and impermeable surfaces.

PRODUCT CODE: BDCTAF

BS EN Specification: Type C Class 2

Colours

White



Size: 20kg

Rapid-Flex

A one-part, rapid setting, flexible floor and wall tile adhesive for professional use. Suitable for all types of ceramic floor and wall tiles, including mosaics, porcelain, natural stone and vitrified tiles.

Application: Ideally suited for application onto timber panels, wood floors, plywood, composite boards and impermeable surfaces, such as existing quarry tiles, mastic asphalt and power-floated concrete without the need to include a flexi-additive in the mix. Can be used internally or externally and will set sufficiently to receive light traffic in approximately 2-3 hours.

BS EN Specification: Type C Class 2F

Colours

Grey White



Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

Plumbing

Flooring



Tile Adhesives & Grouts

Page Contents:
Cement Based
Adhesives
Tile Maintenance

Rapid-Set

Size: 10kg & 20kg

RAPID-SET
FLOOR AND WALL TILE ADHESIVE
PRODUCT CODE: BDRS20

RAPID-SET
FLOOR AND WALL TILE ADHESIVE
PRODUCT CODE: BDRS10

A specially formulated, fast-setting, thick or thin-bed adhesive for bonding ceramic tiles and mosaics to walls and floors. Because of these fast acting properties, tiles and mosaics can be grouted and suitable for use in approximately 2-3 hours after fixing (at normal room temperature). Interior and exterior use, particularly in locations which are subject to occasional wetting, eg. domestic showers, saunas and bathrooms.

Application: Ideal for bonding to concrete, cement, sand screeds, building blocks, brickwork and primed wooden surfaces. Certain surfaces may need to be suitably primed prior to fixing. See technical data sheet for details. **Note:** This product is not suitable for swimming pools or areas subject to constant water immersion.

BS En Specification: Type C Class 1F

Colours

Grey



Tile Maintenance

A comprehensive range of tile cleaners and tile protectors

Our tile maintenance products have been specially formulated for cleaning, protecting and maintaining today's high standards of natural and porcelain tiles. Whether you are a tiler or a DIYer, you will always obtain a professional product for various applications.

Grout Cleaner / Mould Remover
Restores tile grout while cleaning away unsightly grime. Removes mould from floor and wall tiles in bathrooms and kitchens.

Size: 500ml • Code: BDGC

Tile & Natural Stone Sealer/Polish
Protects stone, enhances the colour and gives a gloss finish.

Size: 500ml • Code: BDTN

Grout Protector
An impregnating solution for protecting tile grout from staining by water, oils and grease. Also helps prevent mould growth and makes it much easier to clean.

Size: 125ml • Code: BDTP

Tile & Shower Screen Cleaner
Cleans and shines in 1 application. Ideal for regular use in bathrooms and kitchens. This product will disinfect and sanitise surfaces.

Size: 1L • Code: BDTS

Stain Barrier!
Protective barrier coating against stains and hard to remove marks.

Size: 500ml • Code: BDSB

NEW

TILE & SCREEN CLEANER
GROUT CLEANER & POLISH
STAIN BARRIER
GROUT PROTECTOR

Tile Adhesives & Grouts

Page Contents:
Tile Adhesives
User Guide

USE	READY MIXED ADHESIVES				CEMENT BASED ADHESIVES				GROUTS				
	SUPER-GRIP	AQUA-TILE	GRIBOND	FIX-N-GROUT	WOOD-TILEX	CTA	RAPID-SET	RAID-FLEX	CTA	FLOOR	WALL TILE	GROUT	WALL TILE
Wall	✓	✓	✓	✓		✓	✓				✓	✓	✓
Floor					✓	✓	✓	✓	✓	✓	✓	✓	✓
Interior, dry	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Worktops		✓			✓								
Domestic Showers	✓	✓	✓	✓		✓	✓	✓	✓		✓	✓	✓
Communal Showers		✓				✓	✓	✓	✓	✓	✓	✓	✓
Swimming Pools						✓			✓	✓	✓	✓	✓
Exterior						✓	✓	✓	✓	✓	✓	✓	✓
Underfloor Heating								✓	✓	✓	✓	✓	✓
SPECIAL PROPERTIES													
Setting Time	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	3 hours	3 hours	24 hours	24 hours	24 hours	24 hours	
Bed Thickness	3mm max	3mm max	3mm max	3mm max	3mm max	3-6mm	3-6mm	3-10mm	3-5mm				
Limited Movement		✓			✓	✓	✓	✓	✓	✓	✓	✓	
Max. Joint Width										10mm	3mm	20mm	
Colour	Off White	Off White	Off White	Brilliant White	Grey	White	Grey	Grey, White	White	Grey	High White	Grey, Charcoal Sandstone, Ivory	
SURFACES													
Fibre/Cement Board	✓	✓	✓	✓		✓	✓	✓	✓				
Blockwork						✓	✓	✓	✓				
Brick/Concrete					✓	✓	✓	✓	✓				
Rendering	✓	✓	✓	✓		✓	✓	✓	✓				
Screeds					✓	✓	✓	✓	✓				
Existing Glaze Tiles	✓	✓	✓	✓		✓	✓	✓	✓				
Mastic Asphalt						✓	✓	✓	✓				
Painted Walls	✓	✓	✓	✓									
Plaster	✓	✓	✓	✓									
Plasterboard	✓	✓	✓	✓		✓	✓	✓	✓				
T&G Floorboards					✓	✓	✓	✓	✓				
Plywood	✓	✓	✓	✓	✓	✓	✓	✓	✓				
Vinyl Tiles						✓	✓	✓	✓				

Key:

✓ = Suitable
+ = Use with Flexible Additive
◆ = Use with Tile Priming Agent

Notes:

○ = Dry conditions only
← = Plywood overlay only

Tile Grout Calculator

(All measurements in mm)

Stage

1. Add
2. Multiply Result
3. Multiply Result
4. Multiply Result
5. Divide Result
6. Divide Result

Length of Tile to Width
by Joint Width
by Joint Depth (Thickness of Tile)
by SG of Grout (normally 1.75kg)
by Length of Tile
by Width of Tile

Result: is kg per m²**Summary:** Material required is :-(Length + Width of Tile) x Joint Width x Joint Depth x 1.75 = Kg/m²

Length of Tile x Width of Tile



BuildersComplete



Page Contents:
Building Chemicals
and Mixes

BuildersComplete

Size: 5L, 25L & 200L

Dustproofer & Hardener

A premium quality, chloride-free, low viscosity liquid that penetrates and chemically seals concrete. Produces a hard wearing, non-dusty surface. Suitable for use on garage, warehouse, factory or workshop floors.



Application: Apply a uniform, thin coat onto the surface brushing in well - do not allow to puddle. Once the first coat has cured (normally overnight) apply a second coat. Very porous surfaces may need further applications. After last application leave for 24 hours to allow final coat to dry. Wash down once dry. **Note:** Do not use on masonry or coloured concrete. Very dense power floated floors may not permit effective penetration. Do not wash floor for at least 24 hours after final coat.

Product Codes: BDH090, BDH091, BDH092

Colours



Clear

Frostproofer & Rapid Hardener

A high performance building chemical that increases frost resistance and accelerates setting time of cements by improving the rate of hydration. Specially developed for brick laying and rendering, etc. at low and sub-zero temperatures. Added to the mix, this product will improve workability and increase strength gain and resistance to water penetration. It allows up to a 15% reduction of gauging water, and can also reduce curing times and shrinkage. Chloride-free.



Application: Add to cement mix. Reduce the amount of gauging water as appropriate (maximum reduction 15%). At temperatures below 4°C the use of hot water is recommended.

Product Codes: BDH030, BDH031, BDH032

Colours



Light Blue

Size: 5L, 25L & 200L

Integral Waterproofer

A high strength cement waterproofer for internal and external rendering, roof screeds, swimming pools, tanks, retaining walls, basement walls and reservoirs. Improves workability and plasticity of concrete and mortar in the wet state and resists water penetration even under pressure.



Application: Add to gauging water. To obtain maximum benefit the minimum amount of water should be used in the mix together with an appropriately rich cement to sand aggregate ratio. In application, the mortar must be well compacted to give a dense homogeneous body. Available as either a pink or green liquid.

Product Codes Pink: BDH020, BDH021, BDH022
Product Codes Green: BDH200, BDH201, BDH202

Colours



Pink



Green

Size: 2.5L, 5L, 25L & 200L

Brick & Patio Cleaner

A powerful acid based (9%) cleaner that will remove cement and mortar splashes, grime, oil, grease and other difficult-to-remove stains, from brick-work, patios, garages, paving, concrete floors and warehouses.



Application: Apply by brush and allow to stand for 10-15 minutes - do not allow to dry out. Scrub with a stiff brush then rinse thoroughly using a hose pipe. Can be used undiluted for stubborn stains. To remove efflorescence dilute 4 parts water, brush on and rinse off. **Note:** this product will attack limestone and marble.

Product Codes: BDH080, BDH081, BDH082, BDH083

Colours



Clear

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

plumbing

Flooring

BuildersComplete

Page Contents: Building Chemicals and Mixes

High Strength Brick Acid

A powerful acid cleaner that will remove cement and mortar splashes from brick work, pavings, concrete floors & warehouses.

Application: Test a small area prior to application. Product should be diluted to recommended levels. Apply by brush and allow to stand for 10-15 minutes. Do not allow to dry out. Scrub with a stiff brush then rinse thoroughly with a hose pipe. Can be used undiluted for stubborn stains. **Note:** This product will attack limestone, marble, stainless steel and aluminium.



Product Codes: BDH085

Colours



Clear

Mould Release Oil

A chemical release agent for mould and shutter surfaces prior to casting concrete, giving a clean release. After removal of formwork the concrete will have a smooth uniform hard finish with reduced incidence of blow holes.

Application: Suitable for use on plywood, timber, steel and plastic faced formwork. Coverage: Up to 60m² per litre dependant on porosity. Apply before first pour and re-apply before subsequent pours immediately after stripping and cleaning the mould. Application can be spray or fine haired brush.



Product Codes: BDH090, BDH091

Colours



Patination Oil

Protective coating for new lead. Specially designed to minimise unsightly staining on newly applied lead and the materials fixed below it. Provides even colour and protects surfaces.

Application: The oil should be applied as soon as possible, immediately after each step of the leadwork has been completed. Apply using a soft absorbent cloth. Work horizontally from top to bottom maintaining a wet lower edge.



Product Codes: BDP005, BDP01, BDP02

Colours



Straw

Moss-Stop!

A powerful cleaning agent that removes all types of algae, moss & lichens from brick, stone, roof tiles, concrete, wood, tarmacadam, painted surfaces, decking, garden furniture, paviours, plastic and glass.

- Eradicate moss and algae safely.
- No more slippery footpaths and walkways.
- Non-toxic - safe for pets & wildlife.
- Non-preparation - no scrubbing - no rinsing!

Application: Ideally use when rain is not imminent. Apply using either a spray, soft broom, paint brush or watering can - moss eradication will begin as product dries. Can also be used for small water features which contain no living organisms, to deter growth on new or cleaned surfaces. **Note:** will scorch foliage where it makes contact however small amounts of run-off should not harm roots.



Product Codes: BDH140

Colours



Note: Larger sizes available for all building chemicals to special order.

BuildersComplete

Mould & Mildew Wash

A chemical cleaner that eradicates active mildew, lichens, moss and bacteria and discourages any re-growth once eradicated. Highly effective for treating most substrates including walls (masonry, brickwork, plaster and concrete), roofs (slate, fibre/cement, corrugated iron, lead, built-up felt, timber and concrete) and floors (wood, concrete and asphalt).

Application: Apply 2 coats using a brush or low pressure spray. Scrub into the surface and allow to stand for 24 hours. If the surface is to be treated with another material (e.g. Bond It WATERSEAL) it must first be washed with water. Now available in a handy 1L spray bottle for localised cleaning.



Product Codes: BDH071, BDH070

Colours



Stabilizing Solution

A clear, ready-to-use, water-based treatment for bonding and priming surfaces prior to painting and decorating. Suitable for interior and exterior use and can be applied to damp surfaces. Stabilises poor surfaces, seals & binds chalky or weathered areas, gives a sound base for decorating and is quick drying.

Application: For use as a pre-treatment for surfaces which are old, weathered, chalky or porous. Suitable for use on most substrates including concrete, cement, plaster, plasterboard, renders, pebble dash and MDF, etc. **Note:** Not to be applied when the temperature is below 5°C or when rain or frost is imminent.



Product Codes: BDH130

Colours



Note: Larger sizes available for all building chemicals to special order.

Page Contents: Building Chemicals and Mixes

Size: 5L, 25L & 200L



Liquid Mortar Plasticiser

A chemically balanced plasticiser, based on synthetic air entraining agents, designed to improve workability of brick laying and plastering mortars and increase their resistance to freeze-thaw cycles. Reduces the risk of cracking and crazing and the need for lime. Conforms to BS EN 934-3 2001. Also available on special request, the original wood resin blend.

Application: Add to the cement mix.

Product Codes Red: BDH010, BDH011, BDH012
Product Codes Brown: BDH015, BDH016, BDH017

Colours



Red



SBR Admixture

A styrene butadiene copolymer latex, which increases flexibility of cement screeds and mortars and improves water and chemical resistance and durability. Suitable for internal and external floors and rendering in areas of continual or intermittent water and chemical contact. Excellent waterproofing admixture that improves adhesion of cementitious screeds and reduces shrinkage and cracking when repairing floor screeds. Also ideal as a bonding agent for new to old concrete.

Application: Can be used either as a bonding agent or as an admixture, see the relevant technical data sheet for details.

Product Codes: BDH040, BDH041, BDH042


Colours



Note: Larger sizes available for all building chemicals to special order.



BuildersComplete

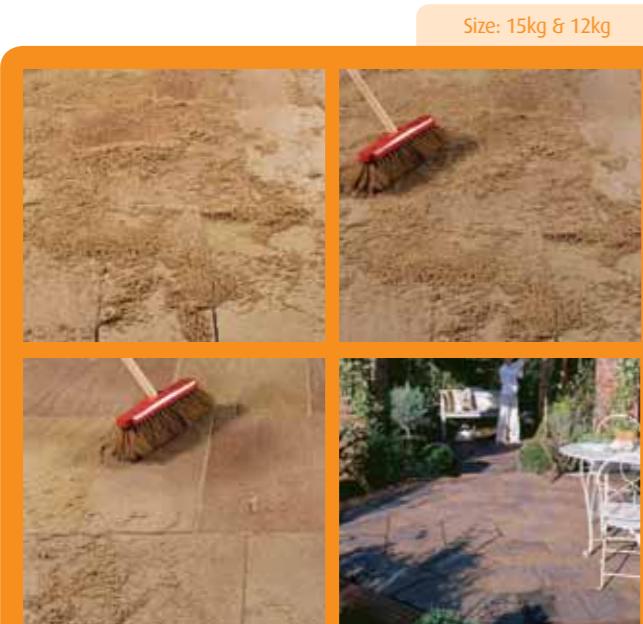

Joint-Fill Paving Compound

PRODUCT CODE:
BDJC1515kg Buff
12kg Grey

A single component joint filling system for the simple and rapid pointing of paved areas with joints over 5mm. Ready-to-use, simple brush application. A unique blend of polymers and aggregates that bind together chemically. On exposure to the atmosphere Joint-Fill forms a stable solid mass that is unaffected by the weather once cured. Eliminates the need for sand/cement pointing!

Application: Ideal for pointing paving with joints 5mm+ and is suitable for domestic and commercial installations, inside and out. Joint-Fill is also compatible with most types of paving including natural stone, terracotta, clay, concrete and cobble stones. It is cost-effective, eco-friendly, and safe to use. Gives an attractive finish. Suitable installations: patios, piazzas, shopping centres, car parks, pathways, service areas - any paved area! N.B. This product must not be applied when rain is imminent.

Page Contents:

Building Chemicals and Compounds

Power-Tone 3 in 1 Concentrated Cement Dye

A premium quality, concentrated cement dye designed to ensure a uniformed colour is attained when colouring cement and mortar. Conforms to BS EN 934-3 2001 and BS EN 12878 1999. Also contains plasticising and waterproofing agents which eliminates the need for additional admixtures. Use of Power-Tone also reduces efflorescence.

Application: As a liquid colourant for all cement based mixes ie. cement, render, mortar, etc, with the added benefit of containing waterproofing and plasticising ingredients. This product is supplied in a carefully measured dosage bottle, simply squeeze the bottle to administer the correct amount of liquid into the delivery nozzle which is then added to the sand/cement mix.

Benefits: Permanently colours cement/mortar; Reduces efflorescence; Non fading; Integral part of mortar or concrete; Versatile and cost-effective; Saves time and money; Guaranteed pre-measured dosage; Controlled dosage to ensure uniformity; Free of dust for easier and healthy handling; Less wastage!



Size: 1L

PRODUCT CODE:
BDH065R

20 X Stronger

Size: 500ml & 1L

Power-Mix - Concentrated Mortar Plasticiser

A premium quality, concentrated mortar plasticiser designed to improve the workability of brick laying and plastering mortars, as well as increasing their resistance to freeze-thaw cycles. Use of POWER-MIX also removes the need for lime and reduces the risk of cracking and crazing. Conforms to: BS EN 934-3 2001.

Application: Add the required amount of liquid to the gauging water. This product is 20 times stronger than standard mortar plasticiser.

PRODUCT CODE:
POWM05 PRODUCT CODE:
POWM1

Colours

Brown

BuildersComplete

PRODUCT CODE:
BDH102PRODUCT CODE:
BDH100PRODUCT CODE:
BDH103PRODUCT CODE:
BDH111

Can be laid upto 10mm

Size: 25Kg

LevelMaster Ad-Floor

A premium grade, 1-pack, polymer modified floor levelling compound. When mixed with water it can be used to level internal floors providing an ideal base for most floor types. Can also be used for bedding and joining quarry tiles, stone and mosaics. Self-smoothing, low odour formulation that is pre-blended requiring only the addition of water. Sets hard within 1-2 hours depending on ambient temperature. Suitable for application up to 10mm in one layer. High early strength allowing for coverings to be laid 6-8 hours after application. Eliminates the need for a latex additive.

Colours

Grey

Can be laid upto 6mm

Size: 10kg & 20Kg

LevelMaster Self-Levelling Compound

A casein-free, waterbased cementitious flooring compound that provides a level base for internal floors. An ideal economical underlay for all modern floor finishes. Note: This product is not suitable as a final wearing course.

- Sets hard within 2-3½ hours depending on temperature.
- Coverings may be laid 6-8 hours after application.
- Pre-blended requiring only the addition of water.
- Economical.
- Can be trowelled to a feather edge.

Colours

Grey

LevelMaster Latex Liquid

A polymeric, liquid latex for use with LevelMaster Self-Levelling Compound. Will improve adhesion and wearing properties. Suitable for use on concrete, well braced timber, mastic asphalt and quarry tiles. Casein-free.

Application: Add 5L liquid to 20kg of powder and mix to a smooth consistency. Mix only enough to use within 20 minutes.

Colours

White

Epoxy Putty Sticks

A re-inforced stick that is kneaded by hand to form an epoxy putty suitable for permanent repairs in damp, wet areas and underwater substrates. A specially formulated epoxy putty that mixes in just one minute. It may be applied under water, in fresh or salt water.

PRODUCT CODE:
BDSPGR

Application: Can be used to permanently patch holes, gouges and scratches in metal, concrete, wood, fibreglass, glass and ceramics. And is suitable for repairing tanks, drums, pipes and castings. Ideal for bonding to all types of metal, including steel, stainless steel, iron, aluminium, brass, copper, bronze, chrome, silver and gold. Also suitable for plastic, PVC, uPVC, glass, ceramics, tiles, porcelain, fibreglass, wood, brick and concrete. Can be used in plumbing, marine, automobile, farming and around the home installations. The putty can be drilled, filed, tapped, machined, etc. after one hour.

Colours

Steel Grey

Powder Mortar Plasticiser

A resin based mortar plasticiser, supplied in a powder form, which can be effectively used for brick laying and rendering. An air entraining plasticiser that replaces lime in the mix, increasing both plasticity and workability to prevent shrinkage, cracking and crazing during the setting process. Will also provide a degree of resistance to freeze-thaw cycles. This product conforms to BS4887:1986 Part 1.

PRODUCT CODE:
BDPMP

Application: Add contents of sachet directly to the mixer at any stage or mix with the gauging water.

Colours

Brown

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

Plumbing

Flooring



BuildersComplete

Page Contents:

Cleaners and Compounds

Multi-Wipes

Multi-purpose trade wipes for hands, tools and surfaces. Cleans paint, adhesive, sealant, expanding foam, bitumen, oil, grease and much more! Foil sealed to prolong shelf life - comes in handy re-sealable container.



- Ideal for the workshop, office, home or on the move.
- No need for water, soap and cleaners.
- No need for dirty towels.
- One wipe does the job!!

Tested by "The Institute For Skin Research" - no reaction (irritation) was recorded on the test subjects! Contains Vitamin E and Aloe Vera to minimise any irritation on skin.

Fire Cement



A buff coloured, ready-to-use cement which has a consistency similar to putty. It is resistant to high temperatures and is both air and heat setting. FIRE CEMENT is a blend of high quality clays and selected fillers that set rock hard when exposed to heat. Does not contain asbestos.

Application: Suitable for use on any surface that is exposed to high temperatures including:

- fitting continuous burning fires
- setting tiles
- jointing iron flue pipes
- building and repairing firebacks
- mending cracked and broken bricks in grates and stoves
- pointing between metals and bricks

Note: The cement is water soluble and should not be used outside or where joints can be eroded by water

Size: 2kg & 5kg

PRODUCT CODE:
BDCF005

PRODUCT CODE:
BDCF002

PVCu Cream Cleaner

An effective solvent-free cleaner for PVCu frames, cladding and trims. Also suitable for use around the house ideal for cleaning taps, trims, plastic or enamel baths and tiles. Removes dirt and stains and can be buffed to give a deep sheen finish. Non-corrosive.

Product Code: BDC003, BDC005 Size: 1L & 25L

PVCu Solvent Cleaner

Fast acting, solvent based cleaner for PVCu frames, cladding and trims. Effectively removes ingrained dirt and restores surface colour without leaving residue. **Note:** should be used with care on wood grain PVC finishes.

Product Code: BDC001, BDC004 Size: 1L & 25L

Glass Cleaner

Fast acting, all-purpose glass cleaner with a non-smear formula. Trigger spray for easy application on 1L bottle. Also excellent for cleaning mirrors.

Size: 150 x 195mm

Paper Towels

2 Ply paper towels. Sheet dimensions: 150mm x 195mm/ 375 sheets per roll.

PRODUCT CODE:
BDPT6



BuildersComplete

Page Contents:

Adhesive Tapes



Drywall Scrim Tape

A high strength, 100% fibreglass close weave (9x9) mesh scrim tape. Self-adhesive backing. Eliminates the need for pre-plastering, provides extra reinforcement and saves time and money.

Codes: BDDT2 **Size:** 90M x 2"

Tape Structure		
CHARACTERISTICS	STD VALUES	TOLERANCE
Backing	100% Fibreglass	
Adhesive	Acrylic	
Total thickness	0.2-0.3mm	+/- 5%
Mass per unit area	65 gr/m ²	+/- 5%
Treatment alkali resistant	18%	+/- 5%
Tensile Strength A) Warp	700 N/cm	+/- 5%
B) Weft	600 N/cm	+/- 5%
Elongation	4%	+/- 5%

Duct Tape

A water-resistant, all-purpose, premium quality duct tape for binding, fixing, sealing, repairing, joining, protecting, marking and much more!

Codes: BDDT48 **Size:** 50M x 48mm **Colour:** Silver
BDDT48WH **Size:** 50M x 48mm **Colour:** White
BDDT48BL **Size:** 50M x 48mm **Colour:** Black

Tape Structure		
CHARACTERISTICS	STD VALUES	TOLERANCE
Backing	Laminated synthetic cloth	
Adhesive	Synthetic rubber resin	+/- 5%
Total thickness	0.19mm	+/- 5%
MD Tensile Strength	30 N/cm	+/- 10%
Adhesion to steel plate	4 N/cm	
Rolling ball tack	1cm	
Service Temperature	0-60°C	



Masking Tape

A premium grade, buff coloured tape for masking and marking when decorating.

Codes: BDMT19 **Size:** 50M x 19mm **Codes:** BDMT48 **Size:** 50M x 48mm
BDMT25 **Size:** 50M x 25mm **Codes:** BDMT75 **Size:** 50M x 75mm
BDMT38 **Size:** 50M x 38mm

Tape Structure		
CHARACTERISTICS	STD VALUES	TOLERANCE
Backing	Impregnated paper	
Adhesive	Synthetic rubber resin	+/- 5%
Total thickness	130mu	+/- 5%
MD Tensile Strength	35 N/cm	+/- 5%
MD elongation at break	8%	+/- 5%
Adhesion to steel plate	5 N/cm	+/- 10%
Rolling ball tack	< 5cm	

BuildersComplete

Page Contents:

Waterproofing Systems

Silicone Ultra Waterseal

Size: 5L

Conforms to: BS6477

PRODUCT CODE: BDH120

A premium grade, solvent-free silicone waterseal conforming to BS6477 parts 1, 3 and 4. Provides a micro-porous water-repellent coating for masonry work, which, while repelling exterior water, allows the emission of water vapour ensuring the interiors and cavity walls remain dry. Used as a masonry waterproofer suitable for use on brick, stone, concrete and unglazed tiles. It protects the surface against water and frost, providing a micro-porous coating which does not change the aesthetic appearance of a building. A secondary benefit of the product is to repel waterborne dirt and resist fungal growth as well as help reducing heating costs, as energy is not wasted in drying out damp walls.

Application: By brush or non-atomising spray. Shake well before use.

Patioseal

Size: 5L & 25L

PRODUCT CODE: BDH060

A premium grade, eco-friendly solution designed to protect blocks, patios and sand joints from water penetration, oil/petrol/grease spillages and dirt and grime build up. For enhancing the present colour and greatly extending the lifespan of block paving driveways or paths and patios.

Application: This product is ready-to-use. Shake well before use. Ensure a dry surface and apply using a brush or roller, ensuring no ponding occurs. For best results apply two coats, allowing 3-4 hours between coats. Do not apply to wet surfaces, in conditions of high humidity or when rain is imminent. (Protect from rain until fully dry.)

Waterseal

Size: 5L & 25L

Conforms to: BS6477

PRODUCT CODE: BDH050

PRODUCT CODE: BDH051

A premium waterseal designed to repel water from exterior masonry work which allows walls to breathe, reducing the risk of damage caused by water and frost. Conforms to BS6477 substrate groups I & II. Used as a masonry waterproofer suitable for use on brick, stone and concrete. It protects against water and frost, providing a breathable coating which does not change the physical appearance of a building. A secondary benefit of the product is to repel waterborne dirt and resist fungal growth as well as help reducing heating costs as energy is not wasted in drying out wet walls.

Application: By brush or non-atomising spray.



BuildersComplete

Page Contents:

Paints & Dyes

Page Colour Guide:

(WH) White	(R) Red	(BR) Brown	(Y) Yellow	(G) Green	(B) Blue	(O) Orange	(BL) Black
------------	---------	------------	------------	-----------	----------	------------	------------

Line-It Linemarker Paint

Size: 750ml

Powdered Cement Dye

Size: 1kg

A range of easy-to-use, chloride-free permanent cement colourants. Can be used to pigment cement, mortar, concrete and renderings.

Conforms to: BS1014

PRODUCT CODE: BDH060

Application: Add to mix before addition of water.

Colours

BL	BR	Y	R
----	----	---	---

Anti-Climb Paint

Size: 2kg

A non-oxidising specialist coating, developed to deter and prevent unwanted intruders from entering premises. Formulated to remain soft and slippery, it also contains an identifying agent which will mark anyone who comes into contact with it. Developed in conjunction with crime prevention officers, ANTI-CLIMB PAINT is easily applied to most surfaces, including metal and wooden fences, brick walls, sills, gutters, fall pipes, roofs and even chain fencing. Once applied, the coated surfaces will be virtually impossible to climb or scale.

PRODUCT CODE: BDLM

Application: Suitable for interior and exterior use, e.g. car parks, tennis courts, factories, warehouses, gyms, schools, etc. Can be used on asphalt, concrete, wood composites, gravel and grass. Also ideal for survey work.

Colours

Y (001)	WH (002)	R (003)	B (004)	G (005)	O (006)	BL (007)
---------	----------	---------	---------	---------	---------	----------

BDLMT - Line Marker Trolley (to order only)

Bitubond Range



A complete range of high quality bitumen compounds, coatings, paints and primers for exterior roofing applications.

Page Contents:

Bitumen Compounds

Bitubond Range

All Weather Roofing Compound

Size: 2.5L, 5L & 25L

A general purpose, waterproof coating for all common roofing surfaces including mastic asphalt, roofing felt, corrugated iron, fibre/cement, slates, lead, copper, tin and zinc. Excellent adhesion to damp surfaces, resistance to extremes of temperature and does not crack in the cold or flow in the sun. Recommended where the threat of frost or rain precludes the use of an emulsion. Can be overcoated with a suitable decorative solar reflective paint to prolong the life of the coating.

Application: by brush or broom.

Product Codes: BDB026, BDB027, BDB028

Chipping Solution

Size: 5L & 25L

A ready-to-use, premium grade, cold-applied bitumen solution for bonding chippings to roofs that are flat or of low pitch up to a maximum of 1 in 8 fall. Has immediate resistance to rainfall and provides protection from sunlight. Can be used with chippings such as flint, gravel, limestone, granite and white calcined spar. Weatherproof finish with F.A.A. rating for ignition, penetration and spread of flames.

Application: by brush or squeegee.

Product Codes: BDB023, BDB024

Aluminium Solar Reflective Paint

Size: 2.5L, 5L & 25L

A light/heat reflective coating that will provide protection against solar degradation and heat gain. It is suitable for use over bituminous coatings, aged asphalt and primed steel. It is a superior alternative to chippings when applied in a two coat application. Reduces heat build up and gives a reflective finish to bituminous coatings and primed steel. Suitable for the refurbishment of aged steel roofs.

Application: by brush or mohair roller.

Product Codes: BDB030, BDB021, BDB022

Bitumen Primer

Size: 1L, 2.5L, 5L & 25L

A low viscosity primer for use on smooth or friable surfaces prior to the application of bituminous materials and flashing tapes. Heavy duty formula making it suitable to prime concrete roofs and floors, cementitious screeds/renders, bitumen felt, weathered bitumen, mastic asphalt, weathered corrugated iron and steel.

Application: by brush, squeegee or spray.

Product Codes: BDB034, BDB019, BDB020, BDB029

Page Contents:

Bitumen Compounds

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

plumbing

Flooring

Bitubond Range

Rubber Bitumen Emulsion



A solvent-free, rubberised bitumen emulsion which dries to a tough, black coating providing a highly effective cold-applied, damp-proof membrane in sandwich constructions. It can also be used as a waterproofer for floors, walls and other above ground structures and acts as a curing membrane when applied to green concrete. It is equally effective as an adhesive for wood blocks, wood mosaic panels, insulation boards, expanded polystyrene and cork panels, or as a plaster bonding agent on difficult surfaces. It can also be applied to damp surfaces. Resistant to extreme cold and has a low odour.

Application: by brush or broom.

Product Codes: BDB008, BDB009, BDB010

Bitumen Paint



A solvent-borne, bituminous black paint for the waterproofing and weather protecting of steelwork, concrete and potable water tanks. Used for the protection of ferrous and non-ferrous metals, concrete roofing, felt, fibre/cement, corrugated iron, asphalt and wood, against water. Surfaces to be painted must be completely dry and clear of loose material and any corroded areas primed prior to application. Suitable for drinking water tanks as it forms an odourless and taint-free bitumen film coating.

Application: by brush or spray.

Product Codes: BDB015, BDB016, BDB017, BDB018

Page Contents: Bitumen Compounds

Felt Adhesive



A cold applied, solvent-borne, heavy duty adhesive for bonding all types of bituminous roofing felts to asphalt, felt, metal and concrete. It can also be used for bonding mineral chippings to bituminous surfaces.

Note: It may not be used over tar based products.

Application: by brush, mop or squeegee.

Product Codes: BDB000, BDB001, BDB002, BDB003

Trowel Mastic



A multi-purpose, trowel grade material for waterproofing, stopping, bedding, pointing and sealing. Can be applied to most common roofing surfaces including mastic asphalt, roofing felt, corrugated iron, cast iron, fibre/cement, slates, lead, copper, zinc, concrete and timber. Fibre reinforced making it ideal for filling cracks and holes and cures to give a strong and flexible compound.

Application: by steel trowel or putty knife.

Product Codes: BDB011, BDB012, BDB013

Bitubond Range

Flashing Tapes



3M size also contains a tin of primer for application.

Crease resistant, lead coloured, self-adhesive flashing tape for general repairs and sealing. Designed for use as flashing on flat and pitched roofs, on parapets and chimney stacks. It is also ideal for sealing around RSJ's, flues, concrete columns, roof-lights, guttering and extractor vents. The strength of the facing gives resistance to puncturing and the bitumen gives flexibility and adhesion but without the problems of slump.

Size:	Codes:	Size:	Codes:
10M length x 50mm	BDF001	10M length x 150mm	BDF004
10M length x 75mm	BDF002	10M length x 225mm	BDF005
10M length x 100mm	BDF003	10M length x 300mm	BDF006
3M length x 100mm	BDF009	10M length x 450mm	BDF007
3M length x 150mm	BDF010	10M length x 900mm	BDF008
3M length x 225mm	BDF011		

Damp Proof Courses

- Cost effective damp-proof course for domestic construction.
- Embossed to assist mortar adhesion.
- Durable with proven performance over many years.
- Manufactured from the highest quality reprocessed materials.
- Remains flexible - even at low temperatures.
- Safe and clean to handle.
- Suitable for use in horizontal and vertical applications throughout domestic construction.
- Conforms to the requirements of BS6515.



Size:	Codes:	Size:	Codes:
100 mm x 30 meters	DPC100	300 mm x 30 meters	DPC300
112 mm x 30 meters	DPC112	450 mm x 30 meters	DPC450
150 mm x 30 meters	DPC150	600 mm x 30 meters	DPC600
225 mm x 30 meters	DPC225	900 mm x 30 meters	DPC900

Bitubond 100 Tanking Membrane



A self adhesive, cold applied, flexible waterproof membrane. One side is covered in bitumen and one side is covered in a high density 2-ply, cross laminated polythene film. The underside is protected by a release sheet which is removed prior to the bonding of the material.

Application: Designed for use in tanking ground structures, parking and plaza decks, subways and retaining walls. Remove the protective release sheet. Apply the membrane, bitumen side down, to the prepared surface. Press down firmly, working from the centre to the edges to expel air pockets. Membrane should be overlapped to ensure a good seal; overlap should be a minimum of 75mm at the edges and 100mm at roll ends and should be firmly rolled with a hand held pressure roller.

Product Codes: BDB100

Size: 500ml

Roof & Gutter Repair

For the easy repair of cracks, splits and leaks in timber, bitumen and metals. Ideal as an emergency repair as it provides instant water-proofing protection. Can be applied to either dry or damp surfaces and is suitable for both horizontal and vertical repair work. Has excellent adhesion to most materials, giving an instant protective seal.



Product Codes: BDRGA



Page Contents: Bitumen Compounds

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

plumbing

Flooring

Waterproofing Systems



Page Contents:

Waterproofing Systems

Waterproofing Systems



Size: 5L

Silicone Ultra Waterseal

A premium grade, solvent-free silicone waterseal conforming to BS6477 parts 1, 3 and 4. Provides a micro-porous water-repellent coating for masonry work which, while repelling exterior water, allows the emission of water vapour ensuring the interiors and cavity walls remain dry. Used as a masonry waterproofer suitable for use on brick, stone, concrete and unglazed tiles. It protects the surface against water and frost, providing a micro-porous coating which does not change the aesthetic appearance of a building. A secondary benefit of the product is to repel waterborne dirt and resist fungal growth as well as help reducing heating costs, as energy is not wasted in drying out damp walls.



Application: By brush or non-atomising spray. Shake well before use.

Product Codes: BDH120 **Conforms to:** BS6477

Size: 1kg & 5kg

SealAcryl

A one component, UV stable, solvent-based, multi-purpose roof coating membrane. Designed to prevent the ingress of water whilst allowing any trapped moisture to escape and evaporate naturally. Manufactured with fibre reinforcement pre-dispersed in the can for ease of application.

Benefits: Excellent adhesion
• Application in damp weather
• Instant protection • Superb solar reflectivity • Reinforced membrane • One coat application
• Seamless • Fully flexible • Unaffected by temperature • Economical



Application: For renovation of all types of roof structure. Provides waterproof protection of: flat and pitched roofs, corrugated asbestos, roof lights, flashings, roofing felt, gutters, slate, asphalt, lead, glasshouses, metal and fibreglass. Will also bridge small gaps and cracks. Treat all details first, in areas where excessive movement may occur additional reinforcement can be incorporated into the coating. SEALACRYL can be applied in one coat, but experience has shown that a two coat application ensures a greater uniformity of coating thickness. Do not thin. Apply SEALACRYL using either a brush or roller.

Product Codes: SA5GR, SA1GR

Size: 5L & 25L

Patioseal

A premium grade, eco-friendly solution designed to protect blocks, patios and sand joints from water penetration, oil/petrol/grease spillages and dirt and grime build up. For enhancing the present colour and greatly extending the lifespan of block paving driveways or paths and patios.



Application: A premium grade, eco-friendly solution designed to protect blocks, patios and sand joints from water penetration, oil/petrol/grease spillages and dirt and grime build up. For enhancing the present colour and greatly extending the lifespan of block paving driveways or paths and patios.

Product Codes: BDH061, BDH063

Size: 5L & 25L

Waterseal

A premium waterseal designed to repel water from exterior masonry work which allows walls to breathe, reducing the risk of damage caused by water and frost. Conforms to BS6477 substrate groups I & II. Used as a masonry waterproofer suitable for use on brick, stone and concrete. It protects against water and frost, providing a breathable coating which does not change the physical appearance of a building. A secondary benefit of the product is to repel waterborne dirt and resist fungal growth as well as help reducing heating costs as energy is not wasted in drying out wet walls.



Application: By brush or non-atomising spray.

Product Codes: BDH050, BDH051

Page Contents:

Waterproofing Systems

Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

plumbing

Flooring

Xtreme Products



Xtreme Products

Page Colour Guide:							
(WH) White	(T) Transparent	(IV) Ivory	(BG) Beige	(GR) Grey	(CH) Charcoal	(SS) Sandstone	(LS) Limestone

**XTREME STONESEAL**

Stone seal is a specially formulated, low mod silicone designed for use with natural stone products. It is a neutral cure sealant that will not bleed or leach in to porous stone and is ideal for use with marble and limestone as it will not react. This product is ideal for use with natural stone floor and wall tiles, for granite work tops, travertine, marble and stone products. It is also ideal for use in wet rooms and bath rooms, including around baths, showers, basins and other sanitary ware. Suitable for internal and external applications.

- Contains fungicide to prevent mould growth.
- Conforms to ISO11600-F-25LM.
- Supplied in handy display box.
- Guaranteed not to bleed into natural stone.

Colours

WH	IV	GR	CH	LS	SS
----	----	----	----	----	----



PRODUCT CODE:
BDSTX

**XTREME ALWAYS**

Anti-mould silicone sealant. Guaranteed to prevent mould, mildew and bacterial growth for up to 10 years! Suitable for sealing applications in areas of high humidity such as kitchens, showers, baths, wet rooms, sanitary ware, etc. Can also be used around window and door frames in areas that have high condensation levels.

- Stays mould-free for 10 years & protects against discolouration.
- Contains powerful anti-fungal biocide.
- Supplied in handy display box.

ALWAYS WHITE CODE: BDSANXWH
ALWAYS CLEAR CODE: BDSANXCL
ALWAYS IVORY CODE: BDSANXIV

Colours

WH	CL	IV
----	----	----

PRODUCT CODE:
BDSANX



Size: 350ml

Box Qty: 12

ECO XTREME Solvent-Free Construction Adhesive

A premium environmentally friendly, multi-purpose, gap-filling adhesive. Water based, totally solvent-free with quick grab properties. Cures to give a tough, durable and permanent bond. Can be used to replace or augment mechanical fixings when bonding brick, building panels, carpets, chipboards, concrete, coving, floor panels, foam insulation, marble, metals, tiles and timber. It is also suitable for bonding polystyrene.

Application: Ideal for fixing batons, cladding, countertops, dry wall partitioning, mouldings and dado rails, mirror tiles, trims and wall boards. Also an excellent adhesive for bonding stair nosings, gripper rods and general construction work.

Colours

WH

PRODUCT CODE:
BDEX350

Size: 350ml

Box Qty: 6, 12 & 24

XTREME CONSTRUCTION ADHESIVE

A superior high strength, instant grab, gap-filling adhesive. Offers excellent crep and slump resistance. Can be used to bond porous and non-porous materials. Can be painted over when dry.

Application: Bonds plastic, brick, rigid insulation (not polystyrene), ceramics, cement composite boards, GRP, metal and laminated plastic. Ideal for bonding timber battens, plaster coving, floorboards, skirting, slates, breeze, block and for use in the furniture and automotive industries. For particular applications contact Technical Department for advice.

XTREME BOX QTY 6 CODE: BDXCA6
XTREME BOX QTY 12 CODE: BDXCA12
XTREME BOX QTY 24 CODE: BDXCA

Colours

BG

PRODUCT CODE:
BDXCA





Plumbing Solutions

Bond It also offer a complimentary range of high quality plumbing products and accessories, ensuring all your sanitary requirements are attainable from one source.

Providing the best level of protection and maintenance for todays modern heating systems.



Size: 1L Box Qty: 10

PC100 Inhibitor

High performance inhibitor of scale, rust, corrosion, hydrogen gassing, microbiological growth and boiler noise. Suitable for use in all types of indirect systems, including aluminium based. Once added, PC100 never needs to be replaced unless the system is drained down.

- Long lasting protection. Will extend the life of the system.
- Non toxic, safe to use, environmentally friendly.
- Non-staining, colourless formulation.
- Prevents boiler noise and pin-holing.
- Complies with latest EU inspection standards using the special "peel off" label to date the system when product has been added.



Product Codes: BDPC100

Size: 1L Box Qty: 10

PC300 Uniclean

Powerful universal cleaner for new central heating systems or those up to 6 months old. Flushes out flux, swarf, insoluble flux residues, jointing pastes and other installation debris and sludge.

- Ideal for use prior to application of PC100/200 Inhibitor.
- Powerful, heavy duty cleaning agent.
- Eradicates corrosive flux residues, which could cause rapid pin-holing corrosion of radiators.
- Eliminates harmful copper deposits being left in the system.



Product Codes: BDPC300

Size: 1L Box Qty: 10

PC400 Flushchem

A heavy duty flushing chemical for cleaning boiler heat exchangers, radiators and pipework in domestic central heating systems.


- Removes corrosion debris and lime scale deposits.
- Stops kettling caused by scale build up and removes cold zones.
- Can be used with power flushing machine.
- Suitable for use with all metals and alloys including aluminium. Can be used on multi-metal systems.
- Totally safe product – non toxic and non hazardous.



Product Codes: BDPC400



Plumbing Solutions



Size: 1L Box Qty: 10

PC500 Radleak

An effective leak sealer for sealing inaccessible leaks and weeping joints in a sealed central heating systems.

- Suitable for reducing pressure loss from sealed systems.
- Will not cause pump or air vent blockages.
- Suitable for multi-metal systems including those containing aluminium.
- Non hazardous, non-flammable and non-irritant.
- High stability, compatible with elastomers.
- Readily dispersible.



Product Codes: BDPC500

Size: 1L Box Qty: 10

PC600 Noise Buster

A non-acidic boiler descaler which stays in the system for life; no need to flush. Knocking and kettling are usually attributable to hard water and limescale and sludge deposit formation on the heat exchanger surfaces. These deposits reduce heat transfer which increases fuel bills and reduces service life of the boiler.

- Removes scale and baked on sludge deposits, preventing them from re-forming.
- Restores heat efficiency, reduces noise and extends boiler life.
- Compatible with plastic tanks, micro-bore and all multi-metal systems including those containing aluminium.



Product Codes: BDPC600

Size: 250g Box Qty: 20

PC700 Bond Flux

A water soluble flux paste. Radiator friendly as will dissolve in hot or cold water.

- Approved for use with gas.
- Non stick formula – allows joint adjustment after fluxing.
- Fast acting – cleans as it solders.



WRAS listed by the Water Regulatory Advisory Scheme as a material which has passed full tests of effect on water quality.

Product Codes: BDPC700

Size: 250ml Box Qty: 10

PC800 Pipe Seal

A solvent based cement for sealing uPVC, muPVC and ABD products. Brush applicator for easy use.



Product Codes: BDPC800

Size: 400g Box Qty: 20



PC900 Pipe Jointing Compound

A non-toxic jointing compound which acts as a lubricant enabling pipe threads to be screwed tight.

- Easy to apply. Thick, smoothable paste giving good coverage.
- Suitable for oil, gas, water and steam applications.



Product Codes: BDPC900

Flooring Range

A comprehensive range of high quality flooring products.
Offering a variety of solvent-free self-levelling compounds,
primers, surface DPM's and floorcovering adhesives.

VD Primer

Size: 10Kg

A universal, solvent-free primer for use on porous and non-porous substrates. Can be applied to both walls and floors in internal applications. Designed for use with "water based" levelling compounds and Schonox LC Latex if a primer is required. Quick drying times and good coverage rates (can be used neat or diluted depending on sub-floor). Carries EC1 rating for very low emissions.

Application: As a primer to reduce absorbency of substrates; as a primer to improve adhesion prior to levelling compound application; as a primer to protect against moisture from the levelling compound (see data sheet). Can be applied by brush, roller or spray. Suitable for use on most substrates and can be used over underfloor heating systems. Note: the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

Approx coverage: 125 – 200m² per 10Kg unit.

Colours

Light Blue

PRODUCT CODE: SCVD10

SHP Primer

Size: 5Kg

A solvent-free, 1-part, acrylic dispersion primer. Can be applied to both walls and floors in internal applications. This primer contains special additives that make it suitable for use on dense impervious substrates. Ideal for priming over existing, firmly bonded, flexible floorcoverings prior to application of AP Gypsum levelling compound. This would include vinyl, linoleum and rubber coverings. It is recommended that this primer is only used where existing floorcoverings cannot be removed. Carries EC1 rating for very low emissions.

Application: As an adhesion primer prior to levelling work. Suitable for terrazzo, ceramic tiles, natural stone, mastic asphalt, concrete, thermoplastic and semi-flexible tiles, lino, vinyl and rubber, metal (such as channelled plate), old coatings and sealers. Can be applied by brush, roller or application pad. Note: the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

Approx coverage: Approx 40 -50m² per 5Kg unit.

Colours

Light Blue

PRODUCT CODE: SCSHP5

SDG Surface Membrane

Size: 10Kg

A dispersion based, 1-part surface membrane. Two coat application, very quick drying & no primer required. Levelling compounds may be overlaid in 1-2 hours depending upon drying conditions.

Application: Currently for use up to 90% RH. Carries EC1 rating for very low emissions. Note: the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

Approx coverage: Approx 40 sq mtrs (2 coats) per 10Kg unit.

Colours

Gold

PRODUCT CODE: SCSDGDPM

Emiclassic

Size: 14Kg & 6Kg

A truly multi-purpose, pressure sensitive, acrylic dispersion floorcovering adhesive. Suitable for probably 97% of all floorcoverings onto porous or non-porous sub-floors. Emiclassic will bond PVC, Designer PVC, Linoleum sheet, rubber up to 4mm thickness, cushioned vinyl, carpets and has recommendation by major floorcovering manufacturers. It is completely solvent-free and has low odour making it ideal for sensitive installations. It has a good bond strength, rapid curing properties, and requires only a short open time. Carries EC1 rating for very low emissions.

Application: Emiclassic is a permanent bond adhesive. It is suitable for bonding textile wall and floor coverings, woven fabrics, needlepunch, PVC, vinyl, lino, cork and synthetic rubber coverings. This product in certain circumstances can be laid over old floorcoverings – please consult our technical department for further information. It is suitable for use with underfloor heating systems and has been tested for use with castor wheel loading according to DIN EN 12 529.

Approx coverage: 45 -70m² depending on type of floorcovering.

Colours

Beige

PRODUCT CODE: SCEMI14

PRODUCT CODE: SCEMI6

Flooring Range

AP

Size: 25Kg

A synthetic, gypsum, interior self-levelling compound. For use from 1mm – 30mm or 10mm -45mm when bulked out with silica sand / granite chippings. High strength values (40 Newton compression strength) with low stress. Protein-free, very low emissions (EC 1). It is suitable for use with underfloor heating systems and for castor wheel loading.

Application: May be used over all substrates but particularly over Gypsum screeds. It is used in conjunction with SHP primer to overlay old firmly bonded resilient floorcoverings. Product is pumpable. Note: the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

Approx coverage: 25Kg of powder plus 6.0 litres water will cover approx 5.5m² @ 3mm thickness.

Colours

White

PRODUCT CODE: SCAP25

APF

Size: 25Kg

FPL Plus

Size: 25Kg

AP

A synthetic, gypsum, interior self-levelling compound. For use from 3-15mm thickness. This product has a high compression strength of 40 N/mm² but is also highly flexible and has low stress. It is protein-free, chromate free, has low pH values and good working properties. It carries the EC1 rating for very low emissions.

Application: Simply add water. Due to its high flexural strength this product is ideal for use on surfaces with movement capabilities, particularly on timber floor boards, chipboard (V100), plywood as well as most common substrates. It is also part of a system to renovate VERY bad subfloors of any construction. APF is quick drying and can take foot traffic in approximately 3 hours. It is pumpable & has a German patent. Note: the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

Approx coverage: 25Kg of powder plus 5.5 litres water will cover approx 5.5m² @ 3mm thickness.

Colours

White

PRODUCT CODE: SCAPF25

APF

A cementitious, self-levelling, water mix, interior flooring compound. For use from 3mm – 40mm thickness or 10mm – 60mm when bulked out with silica sand / 3mm granite chippings. Has low stress levels, high strength values (25 Newton compression strength) and very low emissions (EC 1R). It is suitable for use with underfloor heating systems and for castor wheel loading. This product is protein-free and frost resistant.

Application: Simply add water as per bag instructions. Product is pumpable. Suitable for new build and refurb work and can be used over concrete, cement and gypsum screeds (refer to data sheet), new mastic asphalt screeds (IC10 & IC15). Both VD and SHP primers can be used with this product as required. Note: the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

Approx coverage: 25Kg powder plus 4.4 litres water will cover approx 5m² @ 3mm thickness.

Colours

White

PRODUCT CODE: SCFPL25

Bond It LX16

Size: 10L & 5L

A solvent based, heavy duty, interior adhesive for bonding all types of wood flooring. Ideal for use where the nature of the wood flooring makes it particularly prone to warping when bonded with a waterborne adhesive. Easy to spread with a high shear strength and short open time.

Application: Suitable for use on parquet flooring, woodblock and wood strip to most common substrates. Can be used with underfloor heating systems. Apply by triangular notched trowel, size as recommended by the wood flooring manufacturer. No waiting time necessary prior to laying wood flooring. Note: the correct sub-floor preparation must be conducted prior to laying any flooring systems. Consult our technical department for details.

Approx coverage: Notched Trowel TKB B3, B6, B10 approx. 1.33 – 1.5 m² per Kg, notched trowel TKB B11, B15 approx 0.83 – 1 m² per Kg.

Colours

Beige

PRODUCT CODE: BDLX161

PRODUCT CODE: BDLX162

Bond It GP Adhesive

Size 15Kg

A solvent-free, high tack carpet adhesive with zero calculated VOC's and contains Microban antimicrobial protection.

Application: Will bond the majority of carpets including, backings of foam, actionbac, felt back, jute back, latex unitary back, needlepunch but NOT for use with PVC back carpet. It may also be used to bond both rigid and semi-flexible vinyl tiles but NOT fully flexible vinyls.

Approx coverage: 40 -45m² per 15Kg

Colours

Beige

PRODUCT CODE: BDGPA15

GENERAL PURPOSE FLOORCOVERING ADHESIVE

Merchandising

To enhance the striking livery of Bond It products we also supply to our customers a variety of merchandising stands to help display our product range.

Highest Quality for Reliable Performance

The combination of best quality raw materials, stringent quality control within the manufacturing process and constant product innovation has helped make the Bond It name the professionals' choice for reliability, performance and value.

Comprehensive Range

The constantly growing Bond It range of adhesives and sealants now encompass premium grade acrylics, specialist silicone sealants, tiling products, bitumen, rubber & PVA adhesives, contact adhesives, building chemicals and complementary products.

Excellent Customer Support

In addition to our customer-focused field and telesales operation, we have a team of experienced technical advisors who can provide recommendations based on an in-depth knowledge of industry requirements.



All purchases are subject to our standard terms and conditions which are available on request.

For detailed specifications on any of our products featured please refer to the relevant technical data sheets and health and safety sheets. These are available upon request from our telesales department or can be downloaded from our website: www.bond-it.co.uk

Page Contents:

Floor stands
Cartridge trays

Page Contents:

Merchandising boxes
Leaflets & dispensers
Website



Mate

Premiere

Adhesives

Decorators

Tile Adhesives

Builders

Bitubond

Xtreme

Plumbing

Merchandising

Merchandising Boxes

Sturdy, rip-top, colourful display boxes. Saves unpacking cartridges for shelf display, simply rip off the card and the product displays itself!



Website



Floor Stands

A robust construction, plastic floor stand with 4 shelves. Separate tray available for sealant cartridges. Easy Assembly.

Dimensions: H: 1550mm (Including Header Card)
W: 600mm
D: 300mm



Floor Stands

A robust construction, plastic floor stand with 4 shelves. Complete with 3 plastic trays to support cartridge tubes. Easy Assembly.

Dimensions: H: 1920mm (Including Header Card)
W: 700mm
D: 500mm



Leaflets & Dispensers

A cardboard leaflet for counter top displays and a variety of handy sized leaflets.



Cartridge Trays

A plastic, vacuum formed display tray for cartridge products. Holds 70 cartridges. Can be used on counter tops or as an additional tray in the floor stand.



PRODUCT CODE: POSBD002

PRODUCT CODE: POSBD001

Index Page



Page Contents: Stands

Index Page



